


Part Number	Alternative P/N	Ampere Rating
NC0-3	KLM003	3A
NC0-5	KLM005	5A
NC0-10	KLM010	10A
NC0-15	KLM015	15A

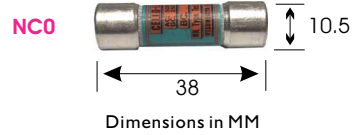

Voltage & I.R.: 500VAC (20kA) / 250VDC (20kA)

NC1 / NC2

Part Number	Ampere Rating	Description	Dimensions in MM	
			A	B
NC1-1	1A	Fuse Link	42	8.9
NC1-3	3A	Fuse Link	42	8.9
NC1-5	5A	Fuse Link	42	8.9
NC1-10	10A	Fuse Link	42	8.9
NC1-15	15A	Fuse Link	42	8.9
NC1-20	20A	Fuse Link	42	8.9
NC1-25	25A	Fuse Link	42	8.9
NC1-30	30A	Fuse Link	42	8.9
NC1-CASE	-	Fuse Case	50	15
NC2-40	40A	Fuse Link	66.4	11.5
NC2-50	50A	Fuse Link	66.4	11.5
NC2-60	60A	Fuse Link	66.4	11.5
NC2-CASE	-	Fuse Case	75	20



Voltage & I.R.: 500VAC (20kA) / 250VDC (20kA)

Note: NC1 (1A-30A) + NC1-CASE = UC1 (1A-30A) Fuse


Note: NC2 (40A-60A) + NC2-CASE = UC2 (40A-60A) Fuse



Notes: Fuse link fits into fuse case.

UC1 / UC2

Part Number	Alternative P/N	Ampere Rating
UC1-1	1451-AR001	1A
UC1-3	1451-AR003	3A
UC1-5	1451-AR005	5A
UC1-10	1451-AR010	10A
UC1-15	1451-AR015	15A
UC1-20	1451-AR020	20A
UC1-25	1451-AR025	25A
UC1-30	1451-AR030	30A
UC2-40	-	40A
UC2-50	-	50A
UC2-60	-	60A

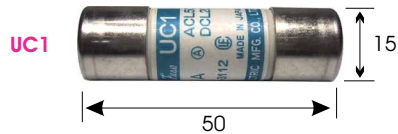

Voltage & I.R.: 500VAC (50kA) / 250VDC (20kA)

JG1

Part Number	Alternative P/N	Ampere Rating
JG1-3	JKS003	3A
JG1-5	JKS006	5A
JG1-10	JKS010	10A
JG1-15	JKS015	15A
JG1-20	JKS020	20A
JG1-25	JKS025	25A
JG1-30	JKS030	30A



Voltage & I.R.: 600VAC (100kA)