

MAXI FUSE 58V




The BF6 58V Maxi blade fuses are specially designed for EV applications. Protects battery packs, traction inverters, energy storage, power conversion, battery disconnect units, charging, primary & auxiliary fuse.



Part Number	Ampere Rating	Body Colour
MAX030-58V	30A	Green
MAX040-58V	40A	Orange
MAX050-58V	50A	Red
MAX060-58V	60A	Blue
MAX080-58V	80A	Natural

Voltage: 58VDC **I.R.:** 1.5kA at 58VDC
Characteristic: Slow Acting
Temperature Range: -40°C to +105°C
Features: Element window.
Terminals: Zinc alloy.
Pack Size: 100, 500, 1000.
Complies With: ISO 8820-3 RoHS

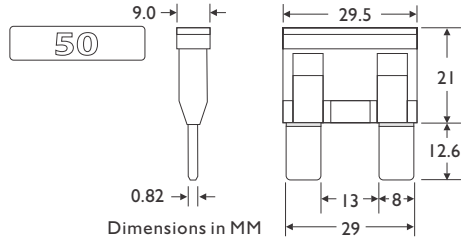

FUSES + KITS

MAXICOMPACT FUSE 32V




The MaxiCompact fuse is new standard for vehicle circuit protection. Its miniature design meets the need for more circuits to be protected while utilizing less space, and its ability to cope with high temperatures in adverse environments makes the MaxiCompact fuse of recommended choice for protection.




Part Number	Ampere Rating	Body Colour
MAXP020	20A	Yellow
MAXP025	25A	Grey
MAXP030	30A	Green
MAXP035	35A	Brown
MAXP040	40A	Orange
MAXP050	50A	Red
MAXP060	60A	Blue
MAXP000AP	Assortment Pack 5pcs	
	20A, 30A, 40A, 50A, 60A	



Voltage: 32VDC **I.R.:** 1000A at 32VDC
Characteristic: Slow Acting
Temperature Range: -40°C to +125°C
Terminals: Zinc alloy, silver plated.
Features: Maxi fuse opaque case to see fuse element.
Holders: Fuse Clips, Inline, PDM's contact sales for details.
Pack Size: 1, 10, 50, 100, 500, 1000
Approvals: ISO 8820-10: 2020

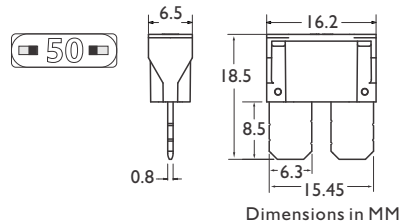

RELATED PRODUCTS:



Email: info@prolegproducts.com.au
 Web: www.prolegproducts.com.au