

Part Number	Ampere Rating	Total I ² t at 1000V
FWJ-20A14F	20A	220
FWJ-25A14F	25A	350
FWJ-30A14F	30A	450
FWJ-35A	35A	2 000
FWJ-40A	40A	2 500
FWJ-50A	50A	3 500
FWJ-60A	60A	5 000
FWJ-70A	70A	6 900
FWJ-80A	80A	9 700
FWJ-90A	90A	12 000
FWJ-100A	100A	17 500
FWJ-125A	125A	35 000
FWJ-150A	150A	45 000
FWJ-175A	175A	65 000
FWJ-200A	200A	80 000
FWJ-250A	250A	112 000
FWJ-300A	300A	164 000
FWJ-350A	350A	231 000
FWJ-400A	400A	330 000
FWJ-500A	500A	329 000
FWJ-600A	600A	520 000
FWJ-800A	800A	500 000
FWJ-1000A	1000A	1 100 000
FWJ-1200A	1200A	2 100 000
FWJ-1400A	1400A	2 700 000
FWJ-1600A	1600A	4 000 000
FWJ-1800A	1800A	5 300 000
FWJ-2000A	2000A	7 600 000



**Ferrule Cartridge Type
FWJ..14F (20A to 30A)**



**Bolted Tag Type
FWJ.. (35A to 2000A)**

- I.R.:** 25kA at 1000VAC (20A to 30A)
 20kA at 800VDC (20A to 30A)
 25kA at 1000VAC (35A to 200A)
 50kA at 800VDC (35A to 200A)
 100kA at 1000VAC (250A to 2000A)
 50kA at 800VDC (450A to 600A)

Voltage: 1000VAC / 800VDC

Characteristic: Type aR, Very Fast Acting


Pack Size: Varies

Holders (35A to 1200A): Blocks (p135-136)

Approvals: CE (20A to 600A)

Diagram

(35A - 2000A)

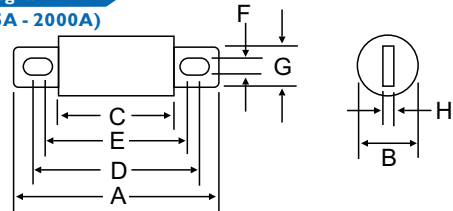

Dimensions in MM

Ampere Rating	A	B	C	D	E	F	G	H	J
35A to 60A	127.0	23.9	79.0	107.6	106.2	8.9	19.1	3.2	9.7
70A to 100A	125.3	28.6	78.4	108.4	105.6	8.9	25.4	4.8	10.3
125A to 200A	144.4	38.8	82.8	122.0	103.0	11.3	25.4	6.4	20.8
250A to 400A	146.5	50.8	88.9	122.2	105.4	11.0	38.1	6.4	19.4
500A to 600A	182.9	63.5	88.0	152.0	119.5	14.3	50.8	9.5	30.5
800A to 2000A	173.0	88.9	84.1	139.0	126.0	15.9	69.9	12.7	22.4

SEMICONDUCTOR

Semiconductor Fuse Blocks.

- Modular design allows for maximum flexibility.
- 1/4", 3/8" and 1/2" Stud size options.
- Up to 1200A. 1500VAC / 1500VDC.
- Optional clear covered versions.
- Slide lock multi pole ability.



For further information please see our fuse block page 135.