



This panel is designed for use with Auto fuses &/or Auto Bladed Circuit Breakers. It can be ordered with a minimum of 4 positions up to a maximum of 20 positions (in multiples of 2). You can also order the panel with a Ground Terminal Pad (GTP) fitted. The GTP features 12 x 1/4" (6.35mm) Q.C. terminals with a common wiring stud.

Short Base GTP not Fitted	Long Base GTP is Fitted	Number of
Part Number	Part Number	Positions
15600-04-20	15600-04-21	4
15600-06-20	15600-06-21	6
15600-08-20	15600-08-21	8
15600-10-20	15600-10-21	10
15600-12-20	15600-12-21	12
15600-14-20	15600-14-21	14
15600-16-20	15600-16-21	16
15600-18-20	15600-18-21	18
15600-20-20	15600-20-21	20

Short Base Without GTP

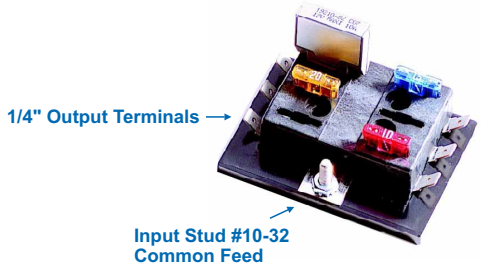

Long Base With GTP

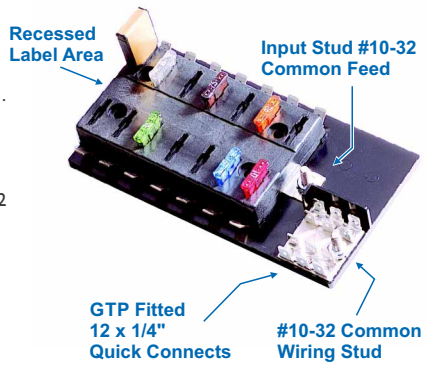

Voltage: 32V
Input Stud Terminal Rating: 100A max total.
Output Terminal Rating: 30A max per circuit.
Positions: 4 to 20 circuits available
Materials: Black thermoplastic
Input Stud: # 10-32 threaded stud.
Hardware: Nut and lockwasher supplied on input terminal.
Output Terminals: 6.35mm x 0.8mm Q.C. terminals.
Wire Size: # 4-6 AWG (Input), # 12-16 AWG (Output).
Feature: Recessed area in centre of block for identification label.
Pack Size: Stock lines 1 pc. Indent items 35pcs.
Notes: *When ordering with a GTP fitted, please add 33mm to dimension 'L' for actual overall length.) Plug-in components such as fuses and breakers not included.
Dual Supply Option: RTA fuse panels can also be ordered with 2 power input studs (dual power feed). Choose from 4-16 fuse/breaker positions for each input stud (20 positions total per panel). Please contact sales for further information.



Total Nbr Positions	Dimensions in MM	
	C	L*
4	-	46.8
6	15.8	62.8
8	31.8	78.5
10	47.5	95.3
12	63.6	110.3
14	79.3	126.3
16	95.6	142.1
18	111.1	158.1
20	127.1	173.9

Retail Pack Option
15600-06-20SP

RELATED PRODUCTS:



Auto Fuses
(see p.17)




LED Auto Fuses
(see p.17)



Auto Bladed Breakers
(see p.49 - 51)

Single Stud, Single Supply Circuit

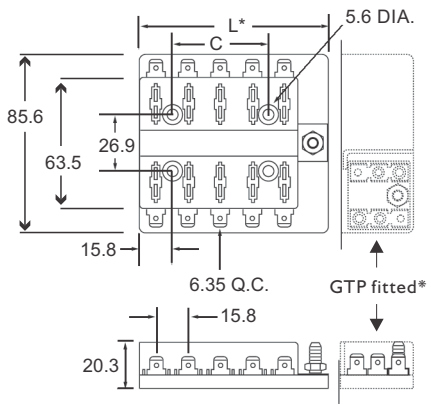

FUSE HOLDERS