


# BRITISH SEMICONDUCTOR FUSES - 572 SERIES 240V

Eaton Bussmann LMMT Range  
Very Fast Acting, Type aR

Part Number	Factory Reference	Ampere Rating	Total I <sup>2</sup> t at 240V
572-FF350	-	350A	TBA
572-FF400	400LMMT	400A	80 000
572-FF500	500LMMT	500A	170 000
572-FF630	630LMMT	630A	300 000
572-FF710	710LMMT	710A	460 000
572-FF800	800LMMT	800A	600 000
572-FF900	900LMMT	900A	800 000



**I.R.:** 200kA at 240VAC  
**Voltage:** 240VAC / 150VDC  
**Pack Size:** 1  
**Holders:** Blocks (p135)  
**Trigger Indicator & Microswitches:** see p48  
**Approvals:** BS88-4 IEC

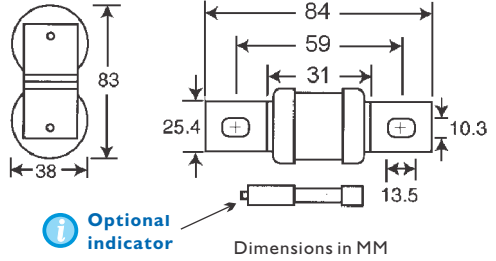


SEMICONDUCTOR

# 631 SERIES 690V

ET Range  
Type aR

Part Number	Factory Reference	Ampere Rating	Total I <sup>2</sup> t at 660V
631-FF015	15ET	15A	65
631-FF020	20ET	20A	170
631-FF025	25ET	25A	250
631-FF032	32ET	32A	350
631-FF035	35ET	35A	500
631-FF040	40ET	40A	900
631-FF045	45ET	45A	1 100
631-FF056	56ET	56A	1 500
631-FF063	63ET	63A	2 000
631-FF080	80ET	80A	4 000

**I.R.:** 200kA at 690VAC  
**Voltage:** 690VAC / 500VDC  
**Pack Size:** 10  
**Holders:** Blocks (p134 - p136)  
**Trigger Indicator & Microswitches:** see p48  
**Approvals:** BS88-4 IEC

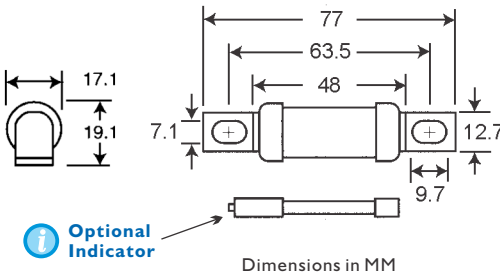

# 621 SERIES 690V

FE Range  
Type aR

Part Number	Factory Reference	Ampere Rating	Total I <sup>2</sup> t at 660V
621-FF035	35FE	35A	200
621-FF040	40FE	40A	300
621-FF045	45FE	45A	450
621-FF050	50FE	50A	600
621-FF063	63FE	63A	750
621-FF071	71FE	71A	950
621-FF080	80FE	80A	1 500
621-FF090	90FE	90A	2 100
621-FF100	100FE	100A	2 800

**I.R.:** 200kA at 690VAC  
**Voltage:** 690VAC / 500VDC  
**Pack Size:** 10  
**Holders:** Blocks (p134 - p136)  
**Trigger Indicator & Microswitches:** see p48  
**Approvals:** BS88-4 IEC

