

# 3AG, M205, 2AG USA FUSE HOLDERS

Littelfuse  
International Shocksafe, Panel Mount

## Example Part Number

Series Number — 345 3 LS 7 L N P

Fuse Options		Body Options		Terminal Options			Washer Options			
Part Code	Fuse Size	Part Code	Body Type	Part Code	Terminal Type	Terminal Size	Terminal Angle	Part Code	Washer Type	
2	2AG	LF	Low Profile	Fingergrip	1	Solder Q/C	4.8mm	Right	L	Lockwasher
3	3AG	RF	Rear Mount	Fingergrip	2	Solder Q/C	4.8mm	Straight	N	Neoprene
5	M205	HS	High Profile	Screwdriver	3	NEMA QC	4.8mm	Right	NP	Drip Proof
		LS	Low Profile	Screwdriver	4	NEMA QC	4.8mm	Straight		O-Ring*
		QS	Quick Mount	Screwdriver	7	NEMA/DIN QC	6.35mm	Right		& Neoprene washer
		QF	Quick Mount	Fingergrip	8	NEMA/DIN QC	6.35mm	Straight		


Approvals	3AG	M205	M58
U.L.	20A @ 250V	10A @ 250V	10A @ 250V
CSA	20A @ 250V	10A @ 250V	10A @ 250V
SEMKO	6.3A @ 250V	6.3A @ 250V	-
VDE	10A @ 250V	10A @ 250V	-
ASA approved AS3135 - 1980 Cert No. CS 84298V (10A, 250V)			

**Ambient Temperature:** -40°C to +85°C.

**Knob:** Finger-Grip, Fuse Extractor type or Screwdriver Slot. Fuse Extractor type with plated copper alloy insert. Plated copper alloy contact clips. Spring loaded, locking mechanism provides an anti-tease feature and will not vibrate loose.

**Notes:** Washer options can be individually or in combination. \*Dip Proof O-Ring can only be used with a screwdriver knob.

## Dimensions in MM

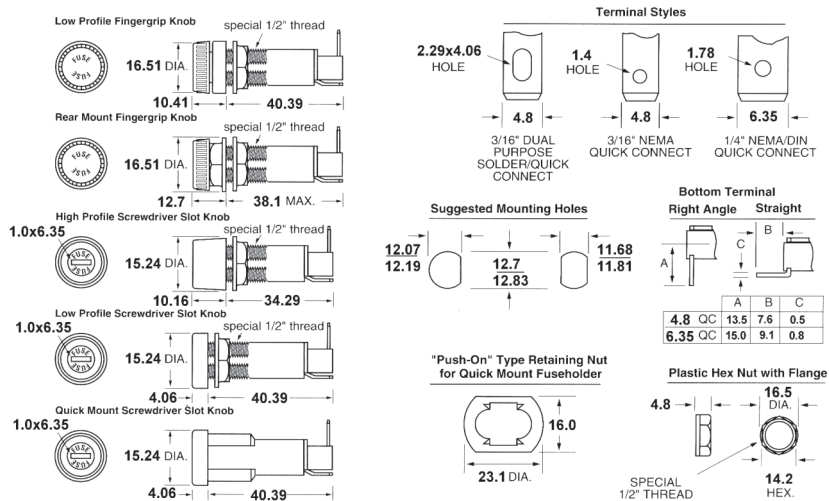

Email: sales@swe-check.com.au  
Web: www.swe-check.com.au

Phone: +61 3 9521 6133  
Fax: +61 3 9521 6177