

# CABLEPRO CABLE PROTECTOR FUSE 32V

Littelfuse  
Slow Acting

The CablePro fuse is designed to replace conventional wire fusible links in high current automotive applications. The slim package of the CablePro and the predictable and reliable performance characteristics (similar to MEGA fuse) make this far superior over wire fusible links. Interrupting rating 2000A @ 32 VDC. CablePro is not a sealed product. To seal it a shrink tube should be used.

Standard Part Number	Ampere Rating	Metric Wire Size	Imperial Wire Size
0496060.Z	60A*	5mm <sup>2</sup>	10AWG
0496080.Z	80A	8mm <sup>2</sup>	8AWG
0496100.Z	100A*	8mm <sup>2</sup>	8AWG
0496125.Z	125A	13mm <sup>2</sup>	6AWG
0496150.Z	150A*	19mm <sup>2</sup>	4AWG
0496175.Z	175A	19mm <sup>2</sup>	4AWG
0496200.Z	200A*	19mm <sup>2</sup>	4AWG



I.R.: 2000A at 32VDC

Voltage: 32VDC


Sealing: A shrink tube should be used.

Pack Size: 50pcs

Operating Temperature: -40°C to +125°C.

Notes: \*Short circuit protection only.

Approvals: ISO 6722 SAE RoHS

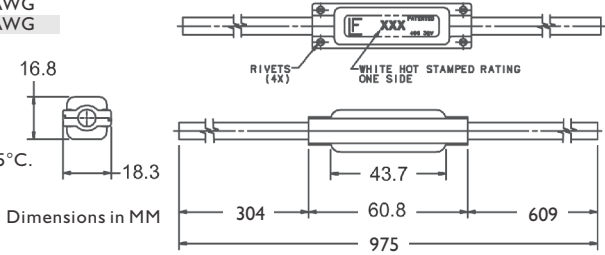

Dimensions in MM



### Customised Ordering

CablePro can be ordered with custom cable lengths on either side of the fuse as well as custom strip lengths on each end of the cable. Please contact sales for further information.

Time Characteristic % of Amp Rating	Opening Time Minimum / Maximum	
100%	100 hrs	—
135%	120 sec	1800 sec
200%	10 sec	300 sec
350%	1 sec	15 sec
600%	300 ms	5 sec

# MULTI-POLE FUSIBLE LINKS (3-IN-1) 32V & 58V

Bussmann  
3 Pole Fuses

Bussmann multi-pole fuses (MPF) are cartridge fuses containing three fuse elements of the same or differing ampere ratings for protecting three circuits with a single design. They are the OEM equivalent to the fuses used on popular Infiniti, Lexus, Nissan and Toyota vehicles manufactured since 2002.

Part Number	Ampere Ratings	Voltage	Colour Code
MPF-433X	40A + 30A + 30A	32VDC	Pink
MPF-444X	40A + 40A + 40A	32VDC	Green
MPF-533X	50A + 30A + 30A	32VDC	Red
MPF-534X	50A + 30A + 40A	32VDC	Blue
MPF-633X	60A + 30A + 30A	32VDC	Yellow

MPF2-324X	30A + 20A + 40A	58VDC	Yellow
MPF2-433X	40A + 30A + 30A	58VDC	Pink
MPF2-444X	40A + 40A + 40A	58VDC	Green
MPF2-533X	50A + 30A + 30A	58VDC	Red
MPF2-534X	50A + 30A + 40A	58VDC	Blue
MPF2-535X	50A + 30A + 50A	58VDC	Black
MPF2-555X	50A + 50A + 50A	58VDC	Maroon

NEW



**MPF (32VDC)**  
32.6 x 15.6 x 28mm  
(L x W x H)



**MPF2 (58VDC)**  
28.5 x 16 x 16mm  
(L x W x H)



I.R.: 1000A at rated voltage

Voltage: See table

Body: PA6T

Element: Copper Alloy

Clear Cover: Amp Stamp

Housing Flammability: UL 94

Pack Size: 1, 10, 50

Operating Temperature: -40°C to +80°C.

Approvals: ISO8820-4, JASO D612-4 RoHS

