

GH SERIES

SIZE D1 (TLU / TXU)



Bussmann Part No.	Redspot Part No.	Ampere Rating	Voltage (VAC)	Voltage (VDC)	Type
GH710	TLU710	710A	550V	-	gG
GH800	TLU800	800A	550V	-	gG
GH1000	-	1000A	550V	-	gG
GH1250	-	1250A	550V	-	gG



Parallel Tag Fixing

GH Specifications

I.R.: 80kA at rated VAC/VDC
Characteristic: See Type Listing
Pack Size (box): 1
Approvals: BS88, IEC269-1
Notes: 660V versions also available contact sales for further information.



Dimensions in MM

Fuse	Ampere Rating	A	B	D	E	F	G	H	J	L
GH	710A - 800A	81	83	198	63.5	9.6	149	14	19	32
GH	1000A - 1250A	81	100	198	63.5	9.6	149	14	19	32

AMERICAN CLASS L FUSES KRP-C_SP

Part Number	Ampere Rating	Voltage (VAC)	Voltage (VDC)	Figure
KRPC601	601A	600V	300V	1
KRPC650	650A	600V	300V	1
KRPC700	700A	600V	300V	1
KRPC750	750A	600V	300V	1
KRPC800	800A	600V	300V	1
KRPC1000	1000A	600V	300V	2
KRPC1200	1200A	600V	300V	2
KRPC1600	1600A	600V	300V	2
KRPC2000	2000A	600V	300V	2


KRP-C_SP Specifications

I.R.: 300kA at 600VAC (KRPC)
 100kA at 300VDC (KRPC - 601A to 2000A)
 50kA at 340VDC (KRPC - all ratings)
Voltage: VAC/VDC (As listed)
Sample P/N: KRPC1400 for 1400A fuse
Pack Size (box): 1
Holders: Boxes for fuses up to 800A (p135)
Fuse Classification: Time Delay (Low-Peak)
Notes: *For further details on ratings below 800A and above 1600A please contact sales.
Approvals: UL, CE, CCC

Available Ratings: 601A, 650A, 700A, 750A, 800A, 801A, 900A, 1000A, 1100A, 1200A, 1350A, 1400A, 1500A, 1600A, 1800A, 1900A, 2000A, 2001A, 2400A, 2500A, 3000A, 3500A, 3800A, 4000A, 4500A, 5000A, 6000A.

Diagram 1

Diagram 2

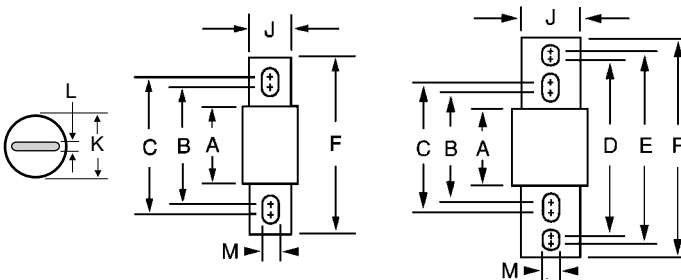

Dimensions in MM

Fuse	Ampere Rating	Diagram	A	B	C	D	E	F	J	K	L	M
KRP-C	601A - 800A	1	95.3	146.2	171.6	-	-	273.3	50.8	63.6	9.7	16.0
KRP-C	801A - 1200A	2	95.3	146.2	171.6	220	259	273.3	50.8	63.6	9.7	16.0
KRP-C	1350A - 1600A	2	95.3	146.2	171.6	220	259	273.3	60.5	76.3	11.2	16.0
KRP-C	1800A - 2000A	2	95.3	146.2	171.6	220	259	273.3	69.9	89.0	12.7	16.0