

The C5268 series of fuse blocks provide the user with design and manufacturing flexibility. Two identical half blocks make up a modular fuse block. These split units can be panel mounted any distance apart to accommodate any length fuse. With this design, the fuse terminal and cable (with termination) are mounted on the same stud, minimizing labor needed for installation.

Part Number	Ampere Rating	Stud Diameter and Thread Type	"A" Stud Height
C5268-5	100A	1/4"-20 UNC (6.35mm)	1.75" (44.45mm)
C5268-3	200A	5/16"-18 UNC (7.93mm)	0.75" (19.05mm)
C5268-2	200A	5/16"-18 UNC (7.93mm)	1.75" (44.45mm)

Pack Size (box): 1 block (order 2 blocks per fuse).

Ambient Temp: 150 °C

Base: Plaslok S5440 phenolic, UL 94V-0 or 94V-1.

Studs: Steel, Zinc Plated

Accessories: Includes nut & spring washer.

Notes: Additional nuts and washers (not included) can be fitted on the stud to elevate the fuse body higher above the fuse base if more clearance is required, refer picture. Fuse not included.

*Ordering Information:

Each fuse requires 2 blocks. The C5268 series is sold as single blocks (order 2 blocks per fuse).



Pair of C5268-2 Blocks*




Pair of C5268-4 Blocks*



Fuse Fitted on a pair of C5268-4 Blocks*



Fuse Fitted on a pair of C5268-5 Blocks*

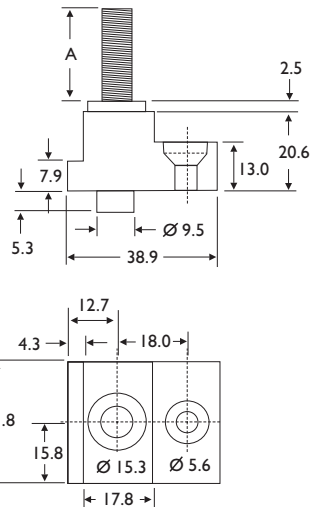

Dimensions in MM

FUSE BLOCK TO FUSE COMPATIBILITY CHART

Fuse Series	Amp Range	C5268-5	C5268-3	C5268-2
250GG	75A - 100A	X		
250GG	75A - 150A		X	X
250GG	160A - 200A		X	X
421-FF	10A - 100A	X		
571-FF	160A - 200A		X	X
621-FF	35A - 100A	X		
631-FF	15A - 80A	X		
701-FF	100A - 100A	X		
701-FF	100A - 200A		X	X
722-FF	75A - 100A	X		
722-FF	75A - 160A		X	X
851-FF	180A - 200A		X	X
861-FF	125A - 200A		X	X
AE5	50A - 200A			X
AE7	60A - 200A			X
AEX	70A - 200A			X
ANL	35A - 100A	X		
ANL	35A - 200A		X	X
ANN	10A - 100A	X		
ANN	10A - 200A		X	X
DFJ	70A - 100A	X		
EET	75A - 100A	X		
EET	75A - 160A		X	X
ET	15A - 80A	X		
EV20	50A - 100A	X		
EV20	50A - 150A			X
EV25	100A - 100A	X		
EV25	100A - 200A			X
EV30	200A - 200A			X
FBT	35A - 100A	X		
FBT	35A - 200A		X	X
FE	35A - 100A	X		
FEE	100A	X		
FEE	100A - 200A		X	X
FM	180A - 200A		X	X
FWA	70A - 100A	X		
FWH	35A - 60A	X		X
FWH	70A - 100A	X		X
FWH	125A - 200A			X
FWJ	35A - 60A	X		X
FWJ	70A - 100A	X		X
FWJ	125A - 200A			X
FWP	5A - 30A	X		
FWP	35A - 60A	X		X
FWP	70A - 100A	X		X
FWP	125A - 200A			X
FWX	35A - 60A	X		X
FWX	70A - 100A	X		
FWX	70A - 200A			X
JJN	70A - 100A	X		
JJN	110A - 200A			X
JJS	70A - 100A	X		
JJS	110A - 200A			X
JKS	70A - 100A	X		
LET	10A - 100A	X		
LMT	160A - 200A		X	X
LPJ..SP	70A - 100A	X		
MT	160A - 200A		X	X
TPL / L17T	70A - 100A	X		

Not all recommended holders may be suitable for your circuit.
Please check the holder specifications are suitable for your fuse.