

DIN BACK UP FUSES (10 / 24kV)



Features: Thermal striker 80N

Dimensions in MM

Standard Range:	Factory Reference	Ampere Rating	I.R.	Body Length	Overall Length	Diameter "D"
44224BT2	004256003	2A	63kA	442	508	53
44224BT4	004256004	4A	63kA	442	508	53
44224BT6	004256005	6A	63kA	442	508	53
44224BT10	004256006	10A	63kA	442	508	53
44224BT16	004256007	16A	63kA	442	508	53
44224BT20	004256008	20A	63kA	442	508	53
44224BT25	004256009	25A	63kA	442	508	53
44224BT32	004256010	32A	63kA	442	508	53
44224BT40	004256011	40A	63kA	442	508	53
44224BT50	004256012	50A	63kA	442	508	68
44224BT63	004256013	63A	63kA	442	508	68
44224BT80	004256014	80A	63kA	442	508	68
44224BT100	004256015	100A	63kA	442	508	85
44224BT125	004256016	125A	63kA	442	508	85

Alternate Ranges:


29224BT/ amp	0042561xx	2A - 16A	31.5kA	292	358	53
29224BT/ amp	0042561xx	20A - 32A	31.5kA	292	358	68
29224BT/ amp	0042561xx	40A - 63A	31.5kA	292	358	85
53724BT/ amp	0042565xx	2A - 40A	63kA	537	603	53
53724BT/ amp	0042565xx	50A - 100A	63kA	537	603	68
53724BT/ amp	0042565xx	125A - 160A	63kA	537	603	85

Pack Size (box): 3

Standard Striker: 50N (Indent)

Thermal Striker: 80N (Stocked), 120N (Indent)

Approvals: IEC 60282-1, DIN 43625, VDE 0670 T402 / IEC 60787, IEC 60644, IEC 60549. Standard range fuses comply with IEC 60282-1 dimensions.

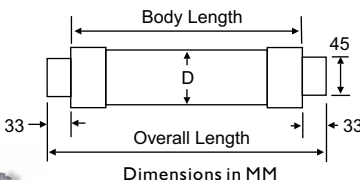

RELATED PRODUCTS:



Clips: (p114)



Holders: Bases (p114)



Extension Caps (p149)



DIN LIQUID-IMMERSED TRANSFORMER FUSES



Features: Thermal striker 80N

Dimensions in MM


Part Number	Factory Reference	Ampere Rating	Voltage	I.R.	Body Length	Overall Length	Diameter "D"
29212LQ/ amp	0042369xx	2A - 40A	6/12kV	50kA	292	358	53
29224LQ/ amp	0042569xx	2A - 16A	10/24kV	50kA	292	358	53
44224LQ/ amp	0042569xx	2A - 40A	10/24kV	50kA	442	508	53

Pack Size (box): 3

Thermal Striker: 80N

Holders: Clips (p114)

Approvals: IEC 60282-1, DIN 43625, VDE 0670 T402 / IEC 60787, IEC 60644, IEC 60549.

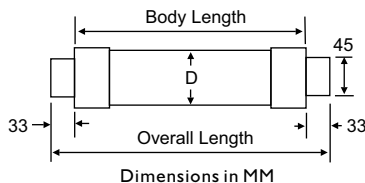

RELATED PRODUCTS:



Clips: (p114)



MEDIUM VOLTAGE