


M205 / 3AG PANEL MOUNT FUSE HOLDERS

Part Number	Fuse Type	Knob Type	Terminal Type / Angle	Rating (UL)
HTB-24M-R	M205	Finger grip	Q/C 4.8mm or Solder, Right	16A @ 250V
HTB-34M-R	M205	Screwdriver	Q/C 4.8mm or Solder, Right	16A @ 250V
HTB-22I-R	3AG	Finger grip	Q/C 4.8mm or Solder, Straight	20A @ 250V
HTB-34I-R	3AG	Screwdriver	Q/C 4.8mm or Solder, Right	20A @ 250V
HTB-26I-R	3AG	Finger grip	Q/C 6.35mm, Straight	20A @ 250V


IPxx
Optional

Voltage: 250V
Terminals: Tin plated brass.
Mounting Standard: Low profile, rear hex nut.
Mounting Option: High profile also available, please contact sales.
Ambient Temperature: -55°C to +85°C.
Body: High temperature, flame retardant thermoplastic UL 94VO.
Accessories: Includes plastic nut and spacer.
Options: Finger-grip type holders may be ordered with 'splash proof' knob (by adding 'SP' to the part number eg. HTB-22ISP). Spare nuts also available in plastic or metal.
Pack Size: 10, 100
Notes: Fuse is not included.
Approvals: CE RoHS

Finger Grip Knob




Mounting Hole Double D




Max. Panel Thickness: 7.62mm

Terminal Options

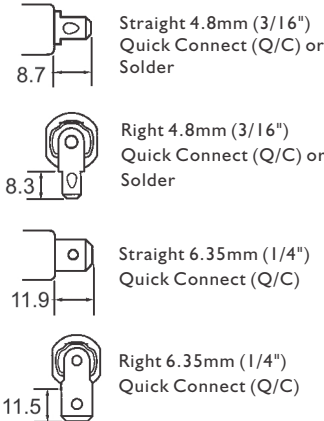


Screwdriver Knob



Dimensions in MM

RELATED PRODUCTS:



M205 Fuses
(p14-15)

3AG Fuses
(p16-17)

3AG FUSE HIGH PROFILE PANEL MOUNT HOLDER



Part Number
HKP

Rating: 30A
Voltage: 250V
Pack Size (bag): 10, 100
Knob: Bayonet type knob
Notes: Vibration resistant
Notes: Fuse is not included.
Approvals: CE RoHS Optional

RELATED PRODUCTS:
Fuses: 3AG/3AB (p16-17)




Mounting Hole Single D



Dimensions in MM



Finger Grip Knob



HOLDERS