

Eaton Bussmann fuses are manufactured with one of these blown fuse indicator systems.

1. Visual Indicator; not designed for use with a microswitch, requires a minimum of 20V to operate.
2. Type T Indicator; compatible with a Type T microswitch, requires a minimum of 20V to operate.
3. Type K Indicator; compatible with a Type K microswitch, requires a minimum of 1.5V to operate.

Type T Microswitch

Part Number	Microswitch Q/C.Lugs	Dimension 'A'
170H0235	6.3 x 0.8mm	20mm
170H0236	6.3 x 0.8mm	17.5mm

Rating: 2A

Voltage: 250VAC

Indication: One normally open (NO) and one normally closed (NC) contact.

Suits Type T Indicator: DIN 43620, DIN 43653, Flush End, French and US Square Body fuses.




170H0235




170H0236

Type T microswitches are fitted onto the cover plate tag of the fuse.

Flag Indicator



Fuse shown with microswitch attached.

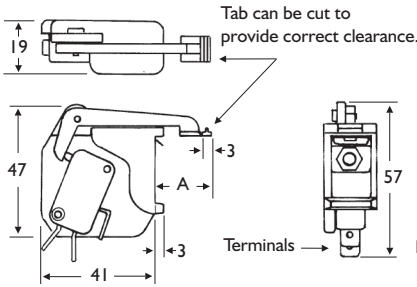

Dimensions in MM

Type K Microswitch

Part Number	Microswitch Q/C.Lugs
170H0069	6.3 x 0.8mm

Rating: 5A

Voltage: 250VAC

Indication: One normally open (NO) and one normally closed (NC) contact.

Suits Type K Indicator: DIN 43653, Flush End, French and US Square Body fuses.


Notes: As a matter of safety, the factory mounted adapter must not be removed from the fuse.




170H0069



Type K microswitches are fitted onto the black indicator body, which is part of the fuse.



Fuse shown with microswitch attached.



Depth: 16.8mm Dimensions in MM