


These fuses are designed for the heavy duty loads associated with DC battery powered equipment such as forklifts, hand trucks, motorized work platforms and other DC battery operated systems.

Adler Fast Acting Part Number	Bussmann Fast Acting Part Number	Bussmann Very Fast Acting Part Number	Ampere Rating
-	-	ANN010	10A
FBT030	-	-	30A
FBT035	ANL035	ANN035	35A
FBT040	ANL040	ANN040	40A
FBT050	ANL050	ANN050	50A
FBT060	ANL060	ANN060	60A
FBT080	ANL080	ANN080	80A
-	-	ANN090	90A
FBT100	ANL100	ANN100	100A
FBT125	ANL125	ANN125	125A
FBT130	ANL130	-	130A
FBT150	ANL150	ANN150	150A
FBT175	ANL175	ANN175	175A
FBT200	ANL200	ANN200	200A
FBT225	ANL225	ANN225	225A
FBT250	ANL250	ANN250	250A
FBT275*	ANL275	ANN275	275A
FBT300	ANL300	ANN300	300A
FBT325*	ANL325	ANN325	325A
FBT350	ANL350	ANN350	350A
FBT355	-	-	355A
FBT400*	ANL400	ANN400	400A
FBT425	-	-	425A
FBT500	ANL500	ANN500	500A
FBT600	ANL600	ANN600	600A
FBT675	ANL675	-	675A
FBT700	-	ANN700	700A
FBT750	ANL750	-	750A
FBT800	-	ANN800	800A

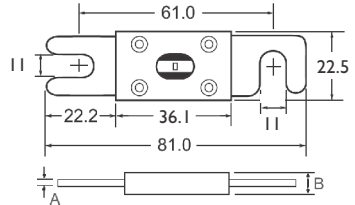

**FBT Series** Dimensions in MM

Ampere Rating	A	B
30A to 325A	1.05	10.6
350A to 600A	1.55	10.6
675A to 800A	2.05	10.6

**FBT AEL Specifications**


**I.R.:** 6 x rated current at 48VDC  
**Voltage:** 48VDC  
**Features:** Element inspection window.  
**Pack Size :** 1, 20, 50  
**Approvals:** UL248, DIN 43560 RoHS

AUTOMOTIVE



**ANL Series** Dimensions in MM

Ampere Rating	A	B
35A to 200A	0.45	7.55
225A to 325A	1.40	8.70
350A to 675A	2.70	9.50
750A	3.35	10.9



**ANN Series** Dimensions in MM

Ampere Rating	A	B
10A to 300A	1.19	9.12
325A to 600A	4.47	12.70
700A to 800A	5.94	13.49

**ANL Specifications**

**I.R.:** 6kA (35A to 500A, 32VAC)  
 2.7kA (600A to 750A, 32VAC)  
 2.7kA (All ratings, 80VDC)  
**Voltage:** 32VAC / 80VDC  
**Features:** Element inspection window.  
 Ignition Proof (<500A).  
**Pack Size:** 1, 5  
**Approvals:**  
 SAE Ignition protected (35A to 500A)  
 (600A, 675A & 750A ratings)



**RELATED PRODUCTS:**



**Fuse Block**  
 (see p.126)

**ANN Specifications**

**I.R.:** 2.5kA (125VAC), 2.7kA (80VDC)  
**Voltage:** 125VAC, 80VDC  
**Features:** Element inspection window.  
**Pack Size:** 1, 5  
**Notes:** ANN series is not ignition proof  
**Approvals:**  
 (35A-400A, 500A DC only)  
 (35A-400A, 500A DC only)