



Part Number	Ampere Rating	Total I ² t at 150V
FWA-5A10F	5A	8
FWA-10A10F	10A	16
FWA-15A10F	15A	55
FWA-20A10F	20A	130
FWA-25A10F	25A	220
FWA-30A10F	30A	400
FWA-35A21F	35A	800
FWA-40A21F	40A	1 000
FWA-45A21F	45A	1 300
FWA-50A21F	50A	1 600
FWA-60A21F	60A	2 400
FWA-70B	70A	4 000
FWA-80B	80A	6 000
FWA-100B	100A	12 000
FWA-125B	125A	18 000
FWA-150B	150A	26 000
FWA-200B	200A	45 000
FWA-250B	250A	70 000
FWA-300B	300A	100 000
FWA-350B	350A	140 000
FWA-400B	400A	180 000
FWA-500A	500A	120 000
FWA-600A	600A	140 000
FWA-700A	700A	220 000
FWA-800A	800A	280 000
FWA-1000A	1000A	510 000

FWA..10F (5A to 30A)




FWA..21F (35A to 60A)



FWA..B (70A to 400A)
FWA..A (500 to 1000A)



Tag Styles	Suffix
	FWA..B
	FWA..A

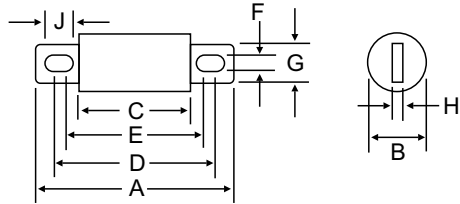

I.R.:

- 100kA at 150VAC, 10kA at 150VDC (5A to 30A)
- 100kA at 150VAC, 50kA at 150VDC (35A to 60A)
- 100kA at 150VAC, 20kA at 150VDC (70A to 400A)
- 200kA at 150VAC, 20kA at 150VDC (450A to 800A)
- 200kA at 150VAC, 20kA at 150VDC (500A to 800A)
- 200kA at 150VAC, 100kA at 80VDC (1 000A)

Voltage: 150VAC/150VDC

Holders: Blocks (p135-136).

Characteristic: Type aR, Very Fast Acting

Notes: Please contact sales for information on ratings above 1000A. **Pack Size:** TBC


Approvals:

Ampere Rating	Dimensions in MM								
	A	B	C	D	E	F	G	H	J
70A to 400A	67.5	25.4	29.4	55.6	49.2	7.9	19.1	3.2	11.1
500A to 1000A	88.9	38.1	31.8	61.9	-	10.3	25.4	6.4	10.3

TELECOM POWER FUSES 170VDC



Littelfuse Part Number	Bussmann Part Number	Ampere Rating
L17T070	TPL-BA	70A
-	TPL-BB	80A
L17T090	TPL-BC	90A
L17T100	TPL-BD	100A
L17T125	TPL-BE	125A
L17T150	TPL-BF	150A
L17T175	TPL-BG	175A
L17T200	TPL-BH	200A
L17T225	TPL-BK	225A
L17T250	TPL-BL	250A
L17T300	TPL-CN	300A
L17T350	TPL-CO	350A
L17T400	TPL-CR	400A
L17T450	TPL-CU	450A
L17T500	TPL-CV	500A
L17T600	TPL-CZ	600A
L17T800	TPL-CZH	800A



Ampere Rating	Dimensions in MM							
	A	B	C	D	E	F	G	H
70A to 250A	29.4	47.6	55.6	67.5	25.4	22.2	7.9	4.8
300A to 800A	31.8	49.2	65.1	88.9	38.1	25.4	10.3	6.35

I.R.: 100kA at 170VDC **Voltage:** 170VDC

Holders: Blocks (p135-136), Disconnect Switches contact sales.

Approvals: