


Part Number	Ampere Rating	Total I ² t at 660V
64I-FF005*	5A	15
6CT	6A	12
10CT	10A	48
12CT	12A	65
64I-FF015*	15A	100
16CT	16A	110
20CT	20A	220

I.R.: 200kA at 690VAC
Voltage: 690VAC / 500VDC
Characteristic: Type aR, Very Fast Acting
Pack Size: 1
Notes: *Please contact sales to clarify specification. Previously known as 64I-FF Series.
Approvals: BS88-4 IEC  

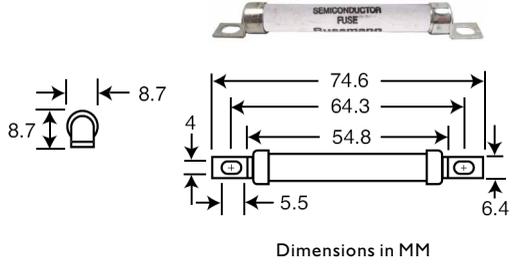

690VAC / 500VDC

EET

Part Number	Ampere Rating	Total I ² t at 660V
75EET	75A	3 280
90EET	90A	4 500
110EET	110A	6 500
140EET	140A	12 000
160EET	160A	17 000


I.R.: 200kA at 690VAC
Voltage: 690VAC / 500VDC
Characteristic: Type aR, Very Fast Acting
Pack Size: 1
Trigger Indicator: (p48)
Microswitches: (p48)
Holders: Blocks (p135 - p136)
Notes: Previously known as 722-FF Series.
Approvals: BS88-4 IEC  

690VAC / 500VDC

FEE

Part Number	Ampere Rating	Total I ² t at 660V
100FEE	100A	2 400
120FEE	120A	3 100
140FEE	140A	3 800
160FEE	160A	5 700
180FEE	180A	8 400
200FEE	200A	11 400

I.R.: 200kA at 690VAC
Voltage: 690VAC / 500VDC
Characteristic: Type aR, Very Fast Acting
Pack Size: 1
Trigger Indicator: (p48)
Microswitches: (p48)
Holders: Blocks (p135 - p136)
Notes: Previously known as 70I-FF Series.
Approvals: BS88-4 IEC  

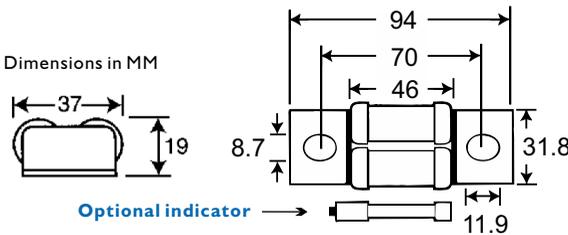

Features

- Minimal energy let-through (I₂t)
- Excellent DC performance
- Good surge withstand profile

RELATED PRODUCTS



Indicator Kits
(page 48)



Fuse Blocks
(page 135)



Fuse Blocks
(page 136)