

SINGLE BODY 690V (aR) FM

| Part Number | Amp Rating | Total I ² t at 660V | Dim. B |
|-------------|------------|--------------------------------|--------|
| 180FM | 180A | 13 500 | 50 |
| 200FM | 200A | 18 500 | 50 |
| 225FM | 225A | 26 500 | 50 |
| 250FM | 250A | 37 500 | 50 |
| 280FM | 280A | 55 000 | 50 |
| 315FM | 315A | 77 000 | 50 |
| 350FM | 350A | 105 000 | 50 |

I.R.: 200kA at 690VAC **Voltage:** 690VAC / 500VDC
Characteristic: Type aR, Very Fast Acting
Pack Size: 1, 3
Holders: Blocks (p135-136)
Indicator & Microswitches: (p48)
Approvals: BS88-4 IEC

DOUBLE BODY 690V (aR) FMM

| Part Number | Amp Rating | Total I ² t at 660V | Dim. B |
|-------------|------------|--------------------------------|--------|
| 400FMM | 400A | 72 500 | 50 |
| 450FMM | 450A | 105 000 | 50 |
| 500FMM | 500A | 150 000 | 50 |
| 550FMM | 550A | 215 000 | 50 |
| 630FMM | 630A | 310 000 | 50 |
| 700FMM | 700A | 420 000 | 50 |

I.R.: 200kA at 690VAC **Voltage:** 690VAC / 500VDC
Characteristic: Type aR, Very Fast Acting
Pack Size: 1, 3
Holders: Blocks (p135)
Indicator & Microswitches: (p48)
Approvals: BS88-4 IEC

SINGLE BODY 690V (aR) MT

| Bussmann Part Number | Adler Part Number | Amp Rating | Dim. B |
|----------------------|-------------------|------------|--------|
| 160MT | AGH3160600 | 160A | 57 |
| 180MT | - | 180A | 57 |
| 200MT | AGH3200600 | 200A | 57 |
| - | AGH3225600 | 225A | 57 |
| 250MT | AGH3250600 | 250A | 57 |
| 280MT | - | 280A | 57 |
| 315MT | AGH3315600 | 315A | 57 |
| 355MT | AGH3350600 | 350A/355A | 57 |

I.R.: 200kA at 690VAC **Voltage:** 690VAC / 500VDC
Characteristic: Type aR, Very Fast Acting
Pack Size: 1, 3
Holders: Blocks (p135-136)
Indicator & Microswitches: (p48)
Notes: *Please contact sales to clarify specification
Approvals: BS88-4 IEC

DOUBLE BODY 690V (aR) MMT

| Bussmann Part Number | Adler Part Number | Amp Rating | Dim. B |
|----------------------|-------------------|------------|--------|
| 200MMT | - | 200A | 57 |
| 225MMT | - | 225A | 57 |
| 280MMT | - | 280A | 57 |
| 315MMT | - | 315A | 57 |
| 355MMT | - | 355A | 57 |
| 400MMT | - | 400A | 57 |
| 450MMT | - | 450A | 57 |
| 500MMT | AG53500600 | 500A | 57 |
| 560MMT | - | 560A | 57 |
| 630MMT | - | 630A | 57 |
| 710MMT | AG53700600 | 710A/700A | 57 |

I.R.: 200kA at 690VAC **Voltage:** 690VAC / 500VDC
Characteristic: Type aR, Very Fast Acting
Pack Size: 1, 3
Holders: Blocks (p135)
Indicator & Microswitches: (p48)
Approvals: BS88-4 IEC

SEMICONDUCTOR

Diagram 1.
(FM / MT)

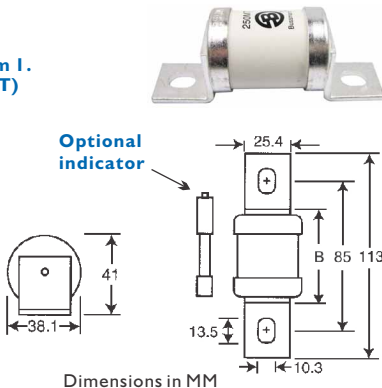


Diagram 2.
(FMM / MMT)

