





**690VAC / 500VDC FM**

Part Number	Amp Rating	Total I <sup>2</sup> t at 660V	Dim. B
180FM	180A	13 500	50
200FM	200A	18 500	50
225FM	225A	26 500	50
250FM	250A	37 500	50
280FM	280A	55 000	50
315FM	315A	77 000	50
350FM	350A	105 000	50

**I.R.:** 200kA at 690VAC **Voltage:** 690VAC/500VDC  
**Characteristic:** Type aR, Very Fast Acting  
**Pack Size:** 1, 3  
**Holders:** Blocks (p135-136)  
**Indicator & Microswitches:** (p48)  
**Notes:** Previously known as 851-FF Series.  
**Approvals:** BS88-4 IEC  


**690VAC / 500VDC MT**

Part Number	Amp Rating	Total I <sup>2</sup> t at 660V	Dim. B
160MT	160A	25 000	57
180MT	180A	38 000	57
200MT	200A	58 000	57
250MT	250A	110 000	57
280MT	280A	150 000	57
315MT	315A	180 000	57
355MT	355A	200 000	57

**I.R.:** 200kA at 690VAC  
**Voltage:** 690VAC / 500VDC (IEC:350VDC)  
**Characteristic:** Type aR, Very Fast Acting  
**Pack Size:** 1, 3  
**Holders:** Blocks (p135-136)  
**Indicator & Microswitches:** (p48)  
**Notes:** \*Please contact sales to clarify specification.  
**Notes:** Previously known as 861-FF Series.  
**Approvals:** BS88-4 IEC  



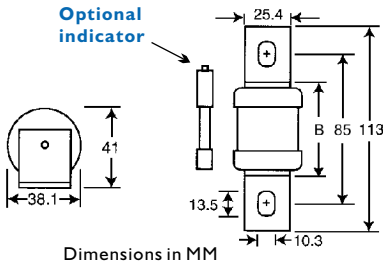

**Diagram 1.**  
(FM / MT)





**690VAC / 500VDC FMM**

Part Number	Amp Rating	Total I <sup>2</sup> t at 660V	Dim. B
400FMM	400A	72 500	50
450FMM	450A	105 000	50
500FMM	500A	150 000	50
550FMM	550A	215 000	50
630FMM	630A	310 000	50
700FMM	700A	420 000	50

**I.R.:** 200kA at 690VAC **Voltage:** 690VAC / 500VDC  
**Characteristic:** Type aR, Very Fast Acting  
**Pack Size:** 1, 3  
**Holders:** Blocks (p135)  
**Indicator & Microswitches:** (p48)  
**Notes:** Previously known as 852-FF Series.  
**Approvals:** BS88-4 IEC  

**690VAC / 500VDC MMT**

Part Number	Amp Rating	Total I <sup>2</sup> t at 660V	Dim. B
180MMT	180A	18 000	57
200MMT	200A	23 000	57
225MMT	225A	40 000	57
280MMT	280A	70 000	57
315MMT	315A	91 000	57
355MMT	355A	140 000	57
400MMT	400A	220 000	57
450MMT	450A	320 000	57
500MMT	500A	450 000	57
560MMT	560A	640 000	57
630MMT	630A	720 000	57
710MMT	710A	850 000	57

**I.R.:** 200kA at 690VAC  
**Voltage:** 690VAC / 500VDC (IEC:350VDC)  
**Characteristic:** Type aR, Very Fast Acting  
**Pack Size:** 1, 3  
**Holders:** Blocks (p135)  
**Indicator & Microswitches:** (p48)  
**Notes:** Previously known as 862-FF Series.  
**Approvals:** BS88-4 IEC  



**Diagram 2.**  
(FMM / MMT)

