


Part Number	Previous Product Code	Ampere Rating	Body Size	Total I ² t at 660V
I70MI558D	00C-GR010	10A	000	27
I70MI559D	00C-GR016	16A	000	51
I70MI560D	00C-GR020	20A	000	82.5
I70MI561D	00C-GR025	25A	000	140
I70MI562D	00C-GR032	32A	000	285
I70MI563D	00C-GR040	40A	000	490
I70MI564D	00C-GR050	50A	000	815
I70MI565D	00C-GR063	63A	000	1 550
I70MI566D	00C-AR080	80A	000	2 700
I70MI567D	00C-AR100	100A	000	4 950
I70MI568D	00C-AR125	125A	000	8 250
I70MI569D	00C-AR160	160A	000	16 500
I70MI570D	00C-AR200	200A	000	31 000
I70MI571D	00C-AR250	250A	000	56 000
I70MI572D	00-AR315	315A	00	84 500

I70M3808D	I-AR040	40A	I	285
I70M3809D	I-AR050	50A	I	550
I70M3810D	I-AR063	63A	I	850
I70M3811D	I-AR080	80A	I	1 350
I70M3812D	I-AR100	100A	I	2 600
I70M3813D	I-AR125	125A	I	3 900
I70M3814D	I-AR160	160A	I	8 250
I70M3815D	I-AR200	200A	I	16 500
I70M3816D	I-AR250	250A	I	31 000
I70M3817D	I-AR315	315A	I	52 000
I70M3818D	I-AR350	350A	I	73 000
I70M3819D	I-AR400	400A	I	115 000
I70M4863D	I-AR450	450A	I	155 000
I70M4864D	I-AR500	500A	I	190 000
I70M4865D	I-AR550	550A	I	240 000
I70M4866D	I-AR630	630A	I	345 000
I70M4867D	I-AR700	700A	I	495 000

I70M5808D	2-AR400	400A	2	79 000
I70M5809D	2-AR450	450A	2	115 000
I70M5810D	2-AR500	500A	2	155 000
I70M5811D	2-AR550	550A	2	215 000
I70M5812D	2-AR630	630A	2	295 000
I70M5813D	2-AR700	700A	2	430 000
I70M5814D	2-AR800	800A	2	610 000
I70M5820D	2-AR900	900A	2	895 000
I70M5816D	2-AR1000	1000A	2	1 300 000
I70M5817D	2-AR1100	1100A	2	1 750 000

I70M6808D	3-AR500	500A	3	99 500
I70M6809D	3-AR550	550A	3	140 000
I70M6810D	3-AR630	630A	3	220 000
I70M6811D	3-AR700	700A	3	320 000
I70M6812D	3-AR800	800A	3	490 000
I70M6813D	3-AR900	900A	3	720 000
I70M6814D	3-AR1000	1000A	3	985 000
I70M6892D	3-AR1100	1100A	3	1 400 000
I70M8554D	3-AR1250	1250A	3	2 150 000
I70M8555D	3-AR1400	1400A	3	2 700 000
I70M8556D	3-AR1500	1500A	3	3 350 000
I70M8557D	3-AR1600	1600A	3	4 150 000

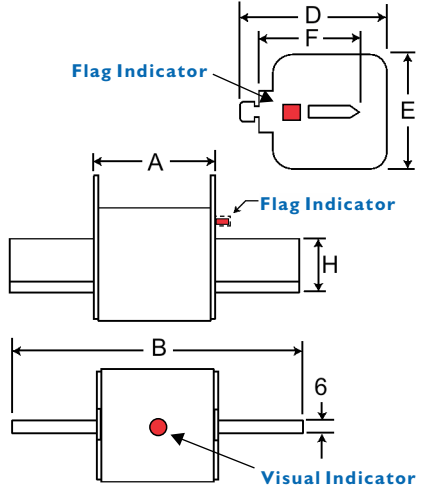

Body Size	Dimensions in MM					
	A	B	D	E	F	H
000	54	79	48	21	35	15
00	53	79	59	30	35	15
1	68	135	64	40	40	20
2	68	150	72	54	48	26
3	69	150	87	71	60	33

Body Size 000, (16A-63A)

I.R.: 200kA at rated voltage.
Voltage: 690VAC (IEC), 700VAC (UL)

Operating Class: gR

Pack Size (box): 3

Holders: Bases (p139), Disconnects (p142-143)

Microswitch (Type T): I70H.. (p148)

Accessories: NH-Extractor (p150)

Features: Flag Indicator

Approvals: IEC 60269-4 IEC

Body Size 000-3, (80A-1600A)

I.R.: 200kA at rated voltage.

Voltage: 690VAC (IEC), 700VAC (UL)

Operating Class: aR

Pack Size (box): 3

Holders: Bases (p139), Disconnects (p142-143)

Microswitch (Type T): I70H.. (p148)

Accessories: NH-Extractor (p150)

Features: Dual Indicator

Approvals: IEC 60269-4 IEC

(all ratings except I70M4867D)

Notes: Dual indicator now fitted on most ratings. This includes both a flag indicator located on the end plate which is powerful enough to trigger a microswitch and a visual indicator located on the front face of the fuse.