




Features:

- Fuse link with glass fiber body.
- Special design with silver plated caps for high power PV applications.
- Ampere ratings available 1A - 80A.
- Time constant: 1-3ms.
- DIN rail carriers & modular fuse blocks available.

Cartridge Part Number	Center Tag Part Number	Offset Tag Part Number	Ampere Rating
A942200B00	A942200B01	A942200B02	20A
A942250B00	A942250B01	A942250B02	25A
A942300B00	A942300B01	A942300B02	30A
A942320B00	A942320B01	A942320B02	32A
A942400B00	A942400B01	A942400B02	40A
A942450B00	A942450B01	A942450B02	45A
A942500B00	A942500B01	A942500B02	50A
A942550B00	A942550B01	A942550B02	55A
A942600B00	A942600B01	A942600B02	60A
A942650B00	A942650B01	A942650B02	65A
A942700B00	A942700B01	A942700B02	70A
A942800B00	A942800B01	A942800B02	80A



Cartridge Fuse

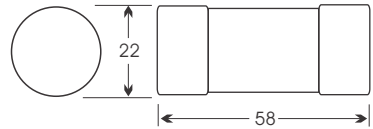

I.R.: 10kA at 1500VDC (1A to 65A),
10kA at 1300VDC (70A to 80A)

Voltage: 1500VDC

Characteristic: Type gPV, Very Fast Acting


Pack Size (box): 10, 20

Cartridge Fuse Carrier: Din Rail Mount


Approvals: E490190 IEC 60269-6

Notes: Ampere ratings 1A-16A contact sales.


Center & Offset Tag Hole Specifications

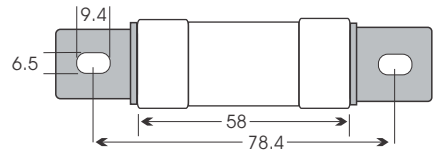

Center Tag Fuse

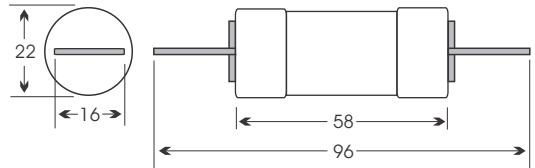

Offset Tag Fuse

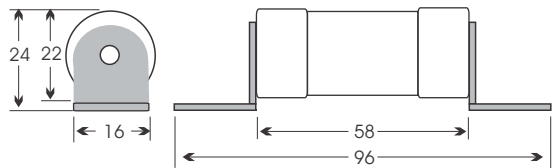

Dimensions in MM

RELATED PRODUCTS:



22x58mm Cartridge Fuse Carrier

BH400 : Non indicating

BH401 : LED indicating



Bolted Tag Fuse Modular Block

LSCR101 : 1/4" Stud, 400A 1000VDC (Page 135)