


Part Number	Ampere Rating
BAF.200	200mA
BAF.250	250mA
BAF.500	500mA
BAF.600	600mA
BAF.800	800mA
BAF001	1A
BAF01.5	1.5A
BAF01.8	1.8A
BAF002	2A
BAF02.5	2.5A
BAF003	3A
BAF004	4A
BAF005	5A
BAF006	6A
BAF6.25	6.25A
BAF007	7A
BAF008	8A
BAF009	9A
BAF010	10A
BAF012	12A
BAF015	15A
BAF020	20A
BAF025	25A
BAF030	30A

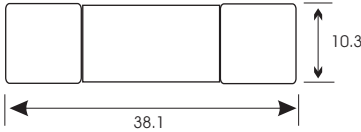

Dimensions in MM

I.R.: 10kA at 125VAC, (call for I.R. @ 250VAC)

Voltage: 250VAC

Characteristic: Fast Acting

Pack Size (box): 10

Holders: Clips (p113), Panel Mount (p120),
Inline (p122), Carrier (p127-128),
Blocks (p133), Disconnecter (p140)


Notes: BAF Series (laminated tube) not recommended for applications in humid areas.

Approvals: (3A to 15A)
 (250mA to 15A)

Recommended Upgrade
KTK Series (p71)



Part Number	Old Part Number	Ampere Rating
KLM.100	DCM.100	100mA
KLM.125	-	125mA
KLM.200	DCM.200	200mA
KLM.250	-	250mA
KLM.300	-	300mA
KLM.500	-	500mA
KLM.750	-	750mA
KLM001	-	1A
KLM1.25	-	1.25A
KLM01.5	-	1.5A
KLM002	DCM002	2A
KLM02.5	-	2.5A
KLM003	DCM003	3A
KLM004	-	4A
KLM005	-	5A
KLM006	-	6A
KLM007	-	7A
KLM008	DCM008	8A
KLM009	-	9A
KLM010	-	10A
KLM012	-	12A
KLM015	-	15A
KLM020	-	20A
KLM025	-	25A
KLM030	-	30A

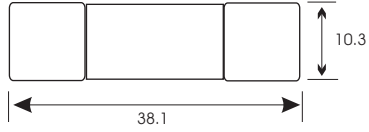

Dimensions in MM

I.R.: 100kA at 600VAC
50kA at 600VDC

Voltage: 600VAC, 600VDC

Characteristic: Fast Acting

Pack Size (box): 10

Holders: Clips (p113), Panel Mount (p120),
Inline (p122), Carrier (p127-128),
Blocks (p133), Disconnecter (p140)

Notes: KLM series replaces the DCM series.

Approvals:
 (KLM series only)

Recommended Upgrade
DCM replaced by KLM

