

DD SERIES SIZE B2 (TF / M09)

Bussmann Part Number	Redspot (415V) Part Number	Ampere Rating	Type	Voltage (VAC)
DD125	TF125L	125A	gG	415V
DD160	TF160L	160A	gG	415V
DD200	TF200L	200A	gG	415V
DD200M250	TF200M250L	200A (250M)	gM	415V
DD200M315	TF200M315L	200A (315M)	gM	415V

DD Specification

I.R.: 80kA at rated VAC
Voltage: VAC (As listed)
 VDC (Please call)

Characteristic: See Type Listing

Pack Size (box): 5

Holders: Carriers (p129)

Notes: 660V versions also available contact sales for further information.

Approvals: BS88, IEC269-1

DD



ED SERIES SIZE B3 (TKF) & B4 (TMF)

Bussmann Part Number	Redspot (415V) Part Number	Ampere Rating	Type	Voltage (VAC)
ED250	TKF250L	250A	gG	415V
ED315	TKF315L	315A	gG	415V
-	TKF315M355*	315A (355A)	gM	690V*
ED355	TMF355L	355A	gG	415V
ED400	TMF400L	400A	gG	415V
ED315M400	-	315A (400M)	gM	415V
ED400M500	-	400A (500M)	gM	415V

ED Specification

I.R.: 80kA at rated VAC
Voltage: VAC (As listed)
 VDC (Please call)

Characteristic: See Type Listing

Pack Size (box): 1


Holders: Please contact sales

Notes: 660V versions also available contact sales for further information.

Approvals: BS88, IEC269-1

Notes: * Fuse is 690VAC/460VDC

ED

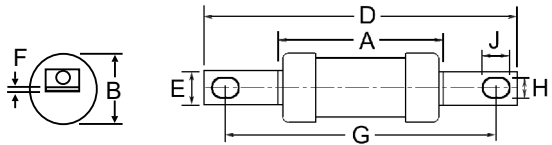

Dimensions in MM										
Fuse	Ampere Rating	A	B	D	E	F	G	H	J	
DD	125A - 200M315	47	31	136	19	3.2	111	9	12.5	
ED	250A	47	31	136	19	3.2	111	9	12.5	
ED	315A	50	38	136	25.4	4.7	111	9	12.5	
ED	315M400	50	38	136	25.4	4.7	111	9	12.5	
ED	355A & 400A	50	38	136	25.4	4.7	111	9	12.5	
ED	400M500	75	59	135.5	25.4	4.7	111	9.5	12.5	