

MEGA FUSE HIGH POWER DISTRIBUTION MODULE 2 POLE



The 2 Pole High Power Distribution Module (HPDM) provides two high current Mega fuse protected circuit outputs as well as an un-fused output that can optionally be used to parallel multiple modules or deliver power to circuits which do not require circuit protection or to daisy chain multiple devices.

IP67 IP69K 48V

Part Number	Description
0301887	2 Pole with cover 32V NEW
880195400	2 Pole with cover 48V

Voltage: Varies see above.
Max Input Current: 600A
Max Fuse Rating Per Circuit: 300A
Ingress Protection Rating: IP67, IP69K
Dimensions: 129 x 125 x 45mm
Notes: Mega fuses not included.
 Either side can be input or un-fused outputs.
 Un-fused output. (eg. starter).
 Two fused outputs.

Unfused Input
Output Studs*
*M10 Stud

Unfused Input
Output Studs*
*M10 Stud



Output A
M10 Stud

Output B
M8 Stud

RELATED PRODUCTS:




Mega Fuse 32V & 70V
(See p.25)



Tubular Terminals
M8 & M10 (See p.188)

Circuit Diagram



Scan this
QR Code
for more
information



QR Code: 9022

MEGA FUSE DISTRIBUTION BLOCKS 5 POLE



Bussmann



Heavy duty power distribution module for main branch primary fusing.
 Common busbar requires just one input connection to power all the fuses.

Part Number	Description
LMG5-I-001	5 Pole with stud input and cover


Rating: Maximum total combined rating is 300A continuous.
 Maximum ampere rating based on fuses, input & output wiring.
Body: Black UL-Rated 94 V0 thermoplastic.
Studs: 5/16"-18 plated steel (E), optional M8 metric studs(M).
Hardware: Includes busbar, nuts & lock washers.
Cover: Red EPDM (provides protection from accidental shorts).
Temperature: -40°C to 85°C. **Notes:** Fuses are not included.



POWER DIST.

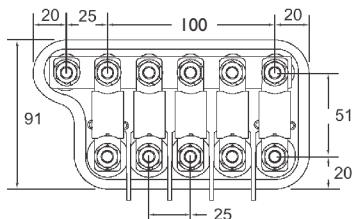

Dimensions in MM




5 pole block has 3 input stud holes to provide 50 or 100mm spacing between the 2 studs.

RELATED PRODUCTS:

Mega Fuses (see p.25)



Circuit Diagram



Email: info@prolecproducts.com.au
 Web: www.prolecproducts.com.au