

## MAXI FUSE 58V



Part Number	Ampere Rating	Body Colour
MAX030-58V	30A	Green
MAX040-58V	40A	Orange
MAX050-58V	50A	Red
MAX060-58V	60A	Blue
MAX080-58V	80A	Natural



**Voltage:** 58VDC

**I.R.:** 1000A at 58VDC

**Characteristic:** Slow Acting

**Features:** Element window.

**Terminals:** Zinc alloy.

**Pack Size:** 1, 10, 100, 1200.


**Holders:** Fuse Clips, Inline, Power Distribution Modules.

**Notes:** For ratings 20A, 25A & 70A contact sales.

For further specifications contact sales.

For 20A, 25A and 70A contact sales.

**Complies With:** ISO 8820-3 RoHS

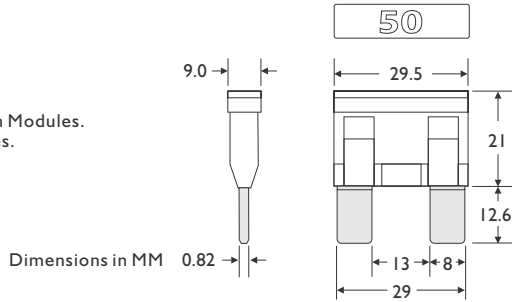

Dimensions in MM

FUSES + KITS

## MAXI+ COMPACT FUSE 32V



The MAXI+ COMPACT fuse is new standard for vehicle circuit protection. Its miniature design meets the need for more circuits to be protected while utilizing less space, and its ability to cope with high temperatures in adverse environments makes the MAXI+ COMPACT fuse of recommended choice for protection.



Part Number	Ampere Rating	Body Colour
MAXP020	20A	Yellow
MAXP025	25A	Grey
MAXP030	30A	Green
MAXP035	35A	Brown
MAXP040	40A	Orange
MAXP050	50A	Red
MAXP060	60A	Blue



**Voltage:** 32VDC

**I.R.:** 1000A at 32VDC

**Characteristic:** Slow Acting

**Component Level Temperature Range:** -40°C to +125°C

**System Level Temperature Range:** -40°C to +105°C

105°C is a typical system level temperature requirement.


**Terminals:** Zinc alloy, silver plated.

**Features:** Maxi fuse opaque case to see fuse element.

**Holders:** Fuse Clips, Inline, PDM's contact sales for details.

**Pack Size:** 1, 10, 50, 100, 500, 1000

**Approvals:** ISO 8820-10: 2020



Dimensions in MM

### RELATED PRODUCTS:



**Fuse & Relay Module**  
(# 01695 contact sales)



**Inline Fuse Holder**  
# 0101881 Fuse Holder  
# 0101882 Fuse Cover  
# 00395 Mounting Pin  
(contact sales)



**Holder Terminals F630E**  
# 08500BK (0.35 - 0.5mm<sup>2</sup>)  
# 08501BK (0.75 - 1.5mm<sup>2</sup>)  
# 08502BK (2.0 - 3.0mm<sup>2</sup>)  
# 08503BK (4.0 - 6.0mm<sup>2</sup>)



Email: [info@prolegproducts.com.au](mailto:info@prolegproducts.com.au)  
Web: [www.prolegproducts.com.au](http://www.prolegproducts.com.au)