

## CIRCUIT BREAKERS - MINI BLADE 14V

Bussmann

| 14VDC<br>Automatic TII | 14VDC<br>Modified TII | Ampere<br>Rating |
|------------------------|-----------------------|------------------|
| Part Number            | Part Number           |                  |
| 21105-00               | 21205-00              | 5A               |
| 21175-00               | 21275-00              | 7.5A             |
| 21110-00               | 21210-00              | 10A              |
| 21115-00               | 21215-00              | 15A              |
| 21120-00               | 21220-00              | 20A              |
| 21125-00               | 21225-00              | 25A              |
| 21130-00               | 21230-00              | 30A              |

**Voltage:** 14VDC

**I. R.:** 150A at 14VDC (5A to 10A)  
225A at 14VDC (15A)  
300A at 14VDC (20A)  
450A at 14VDC (25A to 30A)

**Operating Temp:** -40°C to 85°C

**Storage Temp:** -40°C to 125°C

**Pack Size:** 1, 10, 100pcs

**Approvals:** SAE J553 RoHS

### RELATED PRODUCTS



**Mini Breaker Puller**  
(see p.44)



**Inline Holder**  
(see p.77)




**PDM**  
(see p.120 - 146)



**Automatic TII**



**Modified TII**

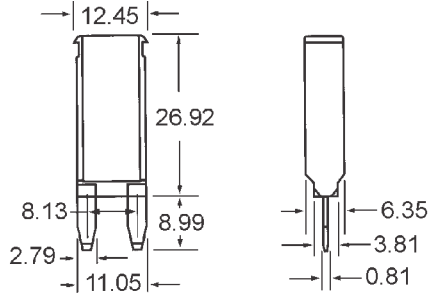

## CIRCUIT BREAKERS - MINI BLADE 28V


Bussmann

### Features:

- Cover is colour coded to amperage ratings.
- Matches Mini fuse footprint, 2.8mm wide blades.
- Manual reset button on top face.

### 28VDC

| Manual TIII | Ampere<br>Rating | Body<br>Colour |
|-------------|------------------|----------------|
| Part Number |                  |                |
| 23305-00    | 5A               | Tan            |
| 23375-00    | 7.5A             | Brown          |
| 23310-00    | 10A              | Red            |
| 23315-00    | 15A              | Blue           |
| 23320-00    | 20A              | Yellow         |
| 23325-00    | 25A              | White          |
| 23330-00    | 30A              | Green          |



**Manual TIII**

**Voltage:** 28VDC

**I. R.:** 100A at 28VDC (5A to 10A)  
150A at 28VDC (15A)  
200A at 28VDC (20A)  
300A at 28VDC (25A to 30A)

**Operating Temp:** -40°C to 85°C

**Storage Temp:** -40°C to 125°C

**Pack Size:** 1, 10, 100pcs

**Approvals:** SAE J553

### RELATED PRODUCTS:



**Inline Holder**  
(see p.77)



**PDM**  
(see p.120 - 146)

