

CIRCUIT BREAKERS - MINI BLADE 14V

Bussmann

14VDC Automatic TII	14VDC Modified TII	Ampere Rating
Part Number	Part Number	
21105-00	21205-00	5A
21175-00	21275-00	7.5A
21110-00	21210-00	10A
21115-00	21215-00	15A
21120-00	21220-00	20A
21125-00	21225-00	25A
21130-00	21230-00	30A

Voltage: 14VDC

I. R.: 150A at 14VDC (5A to 10A)
 225A at 14VDC (15A)
 300A at 14VDC (20A)
 450A at 14VDC (25A to 30A)

Operating Temp: -40°C to 85°C

Storage Temp: -40°C to 125°C

Pack Size: 1, 10, 100pcs

Approvals: SAE J553 RoHS

RELATED PRODUCTS



Mini Breaker Puller
(see p.44)



Inline Holder
(see p.77)




PDM
(see p.120 - 146)



Automatic TII



Modified TII

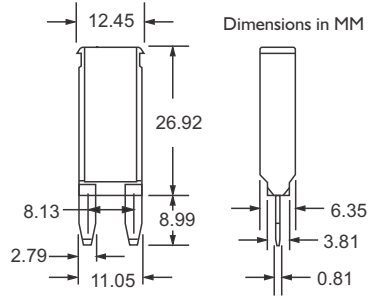

CIRCUIT BREAKERS

CIRCUIT BREAKERS - MINI BLADE 28V

Bussmann

Features:

- Cover is colour coded to amperage ratings.
- Matches Mini fuse footprint, 2.8mm wide blades.
- Manual reset button on top face.

28VDC

Manual TIII	Ampere Rating	Body Colour
Part Number		
23305-00	5A	Tan
23375-00	7.5A	Brown
23310-00	10A	Red
23315-00	15A	Blue
23320-00	20A	Yellow
23325-00	25A	White
23330-00	30A	Green

Voltage: 28VDC

I. R.: 100A at 28VDC (5A to 10A)
 150A at 28VDC (15A)
 200A at 28VDC (20A)
 300A at 28VDC (25A to 30A)

Operating Temp: -40°C to 85°C

Storage Temp: -40°C to 125°C

Pack Size: 1, 10, 100pcs

Approvals: SAE J553


RELATED PRODUCTS:



Inline Holder
(see p.77)



PDM
(see p.120 - 146)



Manual TIII

