

Typically used in auxiliary and accessory circuits for automotive & marine applications. Some models are sealed for engine compartment and bilge area applications.

IGNITION
PROTECTED
IP67

Manual Reset

Type TIII PTT	Ampere Rating
285025P	25A
285030P	30A
285035P	35A
285040P	40A
285050P	50A
285060P	60A
285070P	70A
285080P	80A
285090P	90A
285100P	100A
285110P	110A
285120P	120A
285135P	135A
285150P	150A

Rear View
M6 Studs



Manual Reset PTT
(285 Series)



I.R.: 3kA at 48VDC

Voltage: 48VDC

Termination: M6 threaded studs.

Operating Temp: -40°C to 85 °C.

Storage Temp: -40°C to 125°C.

Ingress Protection Rating: IP67

Housing: UL 94 V-0 thermost plastic.

Indicator: Bright yellow colour reset mechanism provides visual indication of tripped condition on manual reset breakers.

Features: Ignition Protected and weatherproof.

Terminal Hardware: Stainless steel nuts and lock washers installed.

Pack Size: Stock lines 1pc, indent items 60pcs

Notes: The 285 series is a drop in replacement for the 185 series.

I84 series also available which is manual reset only, no PTT feature.

Approvals: SAE J1625, SAE J1171, ABYC E-11 CE



Gasket Accessory
B156-7003-J



Gasket Fitted
To Breaker



Suggested Mounting Cutout

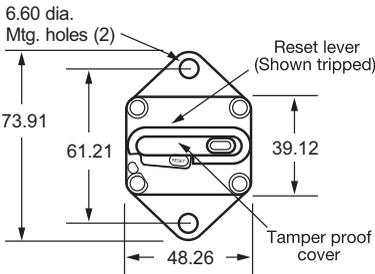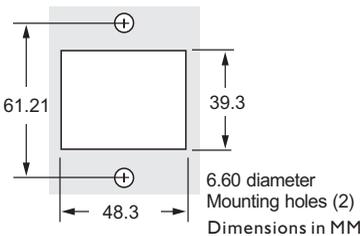

Gasket Part Number: B156-7003-J

Material: Black Santoprene.

Notes: Optional flange mount gasket for through wall applications. Gasket wraps around breaker to provide a seal between the circuit breaker housing and the panel.

