

DIN NH-TYPE FUSES SIZE 0 (500V & 690V)

ETI


500VAC gG	690VAC gG	690VAC aM	Ampere Rating	Body Size
0-NB035	0-GG035	0-AM035	35A	0
0-NB040	0-GG040	0-AM040	40A	0
0-NB050	0-GG050	0-AM050	50A	0
0-NB063	0-GG063	0-AM063	63A	0
0-NB080	0-GG080	0-AM080	80A	0
0-NB100	0-GG100	0-AM100	100A	0
0-NB125	0-GG125	0-AM125	125A	0
0-NB160	—	0-AM160	160A	0
0-NB200	—	—	200A	0



Fuse Specifications: See below.

Dimensions in MM

Size	A	B	C	D
0	125	68	56	28

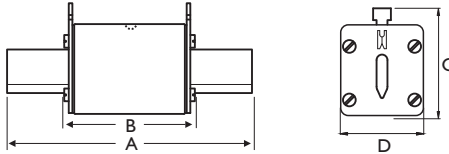

DIN NH-TYPE FUSES SIZE 1C / 1 (500V & 690V)

ETI

500VAC gG	Ampere Rating	Body Size	690VAC gG	Ampere Rating	Body Size	690VAC aM	Ampere Rating	Body Size
1C-NB035	35A	1C	1C-GG035	35A	1C	1-AM035	35A	1
1C-NB040	40A	1C	1C-GG040	40A	1C	1-AM040	40A	1
1C-NB050	50A	1C	1C-GG050	50A	1C	1-AM050	50A	1
1C-NB063	63A	1C	1C-GG063	63A	1C	1-AM063	63A	1
1C-NB080	80A	1C	1C-GG080	80A	1C	1-AM080	80A	1
1C-NB100	100A	1C	1C-GG100	100A	1C	1-AM100	100A	1
1C-NB125	125A	1C	1C-GG125	125A	1C	1-AM125	125A	1
1C-NB160	160A	1C	1-GG160	160A	1C	1-AM160	160A	1
1-NB200	200A	1C	1-GG200	200A	1C	1-AM200	200A	1
1-NB224	224A	1C	1-GG224	224A	1	1-AM224	224A	1
1-NB250	250A	1	1-GG250	250A	1	1-AM250	250A	1
1-NB315	315A	1						
1-NB355	355A	1						

I.R. 500V: 120kA at 500VAC (Type gG/gL/aM) 6A - 250A

I.R. 440V: 120kA at 440VAC (Type gG/gL) 315A - 355A

I.R. 690V: 100kA at 690VAC (Type gG/gL/aM)

Voltage: VAC as rated. VDC call for confirmation.

Pack Size (box): 3

Holders: Bases (p139), Disconnect Switches (p142-143)

Accessories: NH-Extractor (p150)

Notes: Contact sales for ratings below 35A (1C series).

Approvals: IEC60269-2, DIN 43620, VDE 0636

Notes: gL (general application-normal action), aM (motor start-delayed action).

Features: 'Flag' indicator located on top plate of fuse is standard.



Dimensions in MM

Size	A	B	C	D
1C	135	68	61	28
1	135	72	65	46

