


ALARM INDICATING FUSE

**Littelfuse 401 SERIES
Fast Acting Fuse**

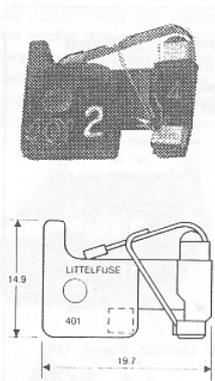

| <u>Part Number</u> | <u>Ampere Rating</u> | <u>Flag Colour</u> | <u>Voltage</u> |
|--------------------|----------------------|--------------------|----------------|
| 401.180 | 180mA | Yellow | 125VAC |
| 401.250 | 250mA | Violet | 125VAC |
| 401.500 | 500mA | Red | 125VAC |
| 401.650 | 650mA | Black | 125VAC |
| 401.750 | 750mA | Brown | 125VAC |
| 401001 | 1 A | Grey | 125VAC |
| 4011.33 | 1.33 A | White | 125VAC |
| 40101.5 | 1.5 A | Yellow/White | 125VAC |
| 401002 | 2 A | Orange | 125VAC |
| 401003 | 3 A | Blue | 125VAC |
| 40103.5 | 3.5 A | Blue/White | 125VAC |
| 401004 | 4 A | Brown/White | 125VAC |
| 401005 | 5 A | Green | 125VAC |
| 40107.5 | 7.5 A | Black/White | 125VAC |
| 401010 | 10 A | Red/White | 125VAC |

DIMENSIONS ARE IN MM

Specifications

Indicator Flag: Colour-coded to indicate ampere rating.
 Contacts: Bright alloy-plated beryllium copper.
 Body: Black phenolic with UL 94V0 flammability rating.
 DC Voltage Rating: 60 volts, all ampere ratings.

| Test Specifications: | 100% | 10 minutes (min) |
|----------------------|------|------------------|
| | 150% | 5 minutes (max) |

Application

This fuse is suitable for telecommunications equipment and other similar applications.

Approvals

Recognised under the Components Program of Underwriters Laboratories.

Littelfuse has renamed this product to 481 series.



Email: sales@swe-check.com.au
 Web: www.swe-check.com.au

Phone: +61 3 9521 6133
 Fax: +61 3 9521 6177