

Part Number	Ampere Rating	Nbr of Poles	Wire Range	Dimensions	
				L x W x H (MM)	Suit Fuse Ratings
R60030-1CR	100mA to 30A	1	#2-14 CU, #2-12AL	159 x 40 x 44	100mA - 30A
R60030-3CR	100mA to 30A	3	#2-14 CU, #2-12AL	159 x 108 x 44	100mA - 30A
SAMI-2N	Cover	1	Non-indicating	-	100mA - 30A
R60060-1CR	35A to 60A	1	#2-14 CU, #2-8 AL	188 x 46 x 53	35A - 60A
R60060-3CR	35A to 60A	3	#2-14 CU, #2-8 AL	188 x 126 x 53	35A - 60A
SAMI-5N	Cover	1	Non-indicating	-	35A - 60A
R60100-1CR	70A to 100A	1	1/0-8 CU/AL	242 x 57 x 61	70A - 100A
R60100-3CR	70A to 100A	3	1/0-8 CU/AL	242 x 149 x 61	70A - 100A
SAMI-8N	Cover	1	Non-indicating	-	70A - 100A
R60200-1CR	110A to 200A	1	250kcmil-6 CU/AL	244 x 77 x 79	110A - 200A
R60200-3CR	110A to 200A	3	250kcmil-6 CU/AL	244 x 229 x 79	110A - 200A
R60400-1CR	225A to 400A	1	500kcmil-4 CU/AL	305 x 77 x 102	225A - 400A
R60400-3CR	225A to 400A	3	500kcmil-4 CU/AL	305 x 296 x 102	225A - 400A
R60600-1CR	450A to 600A	1	500kcmil-4/0 CU/AL	356 x 102 x 127	450A - 600A
R60600-3CR	450A to 600A	3	(2) 500kcmil-4/0 CU/AL	356 x 388 x 127	450A - 600A

Voltage: 600VAC

Suit Fuse: FRSR, KTSR, LPSRK, DLSR

Body: Thermoplastic


Pack Size (box): 1

Flammability: UL 94V0

Notes: Please contact sales for price & availability.

Approvals: CE (U) (E)

(not all blocks are approved to these standards).

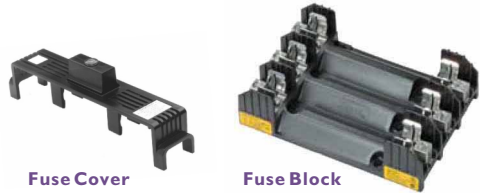

Fuse Cover

Fuse Block