

## 6.3MM DIAMETER PCB MOUNT FUSE CLIPS



|             |          |
|-------------|----------|
| Part Number | Style    |
| FC-101      | End Stop |


**Rating:** 15A

**Material:** Brass, Tin plated

**Pack Size:** 100, 1000

**Suit Fuses:** 6.35 dia. 1AG, 2AG, 3AG, 7AG, 8AG, SFE

**Approvals:**

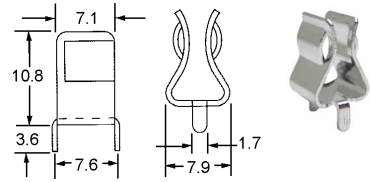

Dimensions in MM

## 10.3MM DIA. PCB MOUNT FUSE CLIPS - MIDGET FUSES



|             |          |
|-------------|----------|
| Part Number | Style    |
| BC800       | End Stop |

**Rating:** 32A


**Material:** Brass, Tin plated

**Pack Size:** 2, 10, 100, 500, 1000

**Suit Fuse:** 10.3mm dia. 5AG, 5AB Styles.

EV Automotive, Industrial Cartridge, PV Solar and Semiconductor Cartridge Fuses.

**Approvals:**

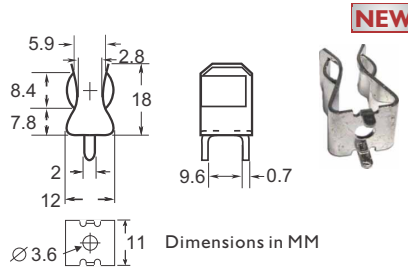

Dimensions in MM

## 25.4MM DIA. SCREW MOUNT FUSE CLIPS - VT MV FUSES



|             |          |
|-------------|----------|
| Part Number | Style    |
| A3354705    | End Stop |


**Rating:** TBA

**Material:** Nickel Silver Alloy

**Pack Size:** 2, 10, 50, 100

**Suit Fuse:** 25.4mm dia. Voltage Transformer fuses (p110).

**Approvals:**

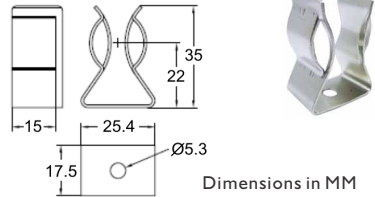

Dimensions in MM

## 51MM to 76MM DIA. FUSE CLIPS - BS2692 MV FUSES



| Part Number | Ampere Rating | Suit Fuse Diameters |
|-------------|---------------|---------------------|
| A3354710    | 200A          | 51mm                |
| A3354720    | 200A          | 63.5mm              |
| A3354730    | 200A          | 76mm                |


**Material:** Nickel Plated Copper

**Pack Size:** 2

**Suit Fuse:** Medium Voltage fuses

British BS 2692-1 (p104-105).

**Approvals:**

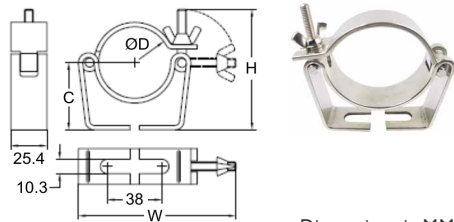

Dimensions in MM

| Ferrule Fuse Types | Suit Fuse Diameters | Dim. "H" | Dim. "W" | Dim. "C" |
|--------------------|---------------------|----------|----------|----------|
| British Air        | 51mm                | 86       | 112      | 48       |
| British Oil        | 63.5mm              | 95       | 124      | 54       |
| British Air        | 76mm                | 100      | 140      | 58       |