

CLASS T, EV & EVSE BOLTED FUSE BLOCKS MODULAR

PROLEC

Features

- Modular and economical.

Part Number	Ampere Rating	Terminal Stud Size (Metric)	Suggested Stud Torque
PSCR001	400A	1/4"-20 (6.35mm)	6.8 Nm
PSCR002	800A	3/8"-16 (9.52mm)	21.6 Nm

Voltage: 1500VAC / 1500VDC

Short Circuit Rating: 250kA

Insulator Material: Molded Phenolic (150°C Max)

Terminal Material: Steel, Zinc plated.

Hardware: Nut and Belleville washer.

Flammability Rating: UL 94-V0

Ordering Information: Sold as a pair of blocks.



(Order 1 pair of blocks to suit one fuse).

Notes: Fuse not included.


Approvals:  



NEW
1500V



PSCR001

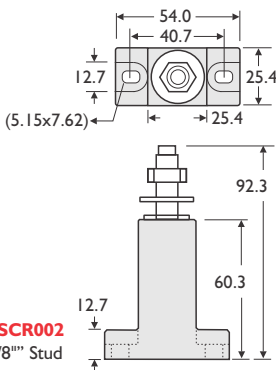

PSCR002

Dimensions in MM

FUSE COMPATIBILITY REFERENCE

Fuse Series	Amp Range	PSCR001	PSCR002
250GG	75A - 150A	X	
250GG	160A - 200A		X
4-GG	630A - 800A		X
4-NB	630A - 800A		X
4-SB	630A - 800A		X
AE5..620	50A - 150A	X	
AE5..625	100A - 250A	X	
AE5..631	200A - 400A	X	
AE5..638	400A - 500A		X
AE5..651	500A - 800A		X
AE6..B02	20A - 35A	X	
AE6..C02	40A - 60A	X	
AE7..i25	60A - 150A	X	
AE7..i38	175A - 400A		X
AE7..i51	450A - 800A		X
AEX..731	70A - 100A	X	
AEX..738	125A - 200A		X
AEX..751	250A - 500A		X
AEX..764	600A - 600A		X
AEX..C64	700A - 800A		X
AG0	25A - 180A	X	
AG2	250A - 400A		X
AG4	15A - 100A	X	
ANL	35A - 400A	X	
ANN	10A - 400A	X	
DFJ	70A - 200A	X	
DFJ	225A - 600A		X
EET	75A - 160A	X	
EF3	100A - 400A	X	
EFT	100A - 400A	X	
EFZ	100A - 300A		X
ET	15A - 80A	X	
FBT	35A - 500A		X
FE	35A - 100A	X	
FEE	100A - 200A	X	
FM	180A - 350A		X
FMM	400A - 700A		X
FWA	70A - 400A	X	
FWA	500A - 800A		X
FWH	35A - 200A	X	
FWH	225A - 800A		X
FWJ	35A - 100A	X	
FWJ	125A - 800A		X
FWP	5A - 100A	X	
FWP	125A - 800A		X
FWX	35A - 200A	X	
FWX	225A - 800A		X
JJN	70A - 200A	X	
JJN	225A - 800A		X

Continued on next page.

Not all recommended holders
may be suitable for your circuit.
Please check the holder
specifications are suitable for
your fuse.

FUSE COMPATIBILITY REFERENCE

Continued from previous page.

Fuse Series	Amp Range	PSCR001	PSCR002
JJS	70A - 200A	X	
JJS	225A - 800A		X
JKS	70A - 200A	X	
JKS	225A - 600A		X
KRPC	601A - 800A		X
LET	10A - 160A	X	
LETa	180A - 180A	X	
LMMT	400A - 800A		X
LMT	160A - 450A		X
LPj..SP	70A - 200A	X	
LPj..SP	225A - 600A		X
MMT	180A - 710A		X
MT	160A - 355A		X
PV-..ANH1-B	63A - 200A	X	
PV-..ANH2-B	160A - 250A		X
PV-..ANH3-B	315A - 400A		X
TPL/L17T	70A - 250A	X	
TPL/L17T	300A - 800A		X

Not all recommended holders
may be suitable for your circuit.
Please check the holder
specifications are suitable for
your fuse.