

AUTO FUSE BLOCKS AXIAL CONNECTION



Features:

- Clear plastic cover for fast visual confirmation of fuse amp rating.
- Easy identification which amperage Auto fuses are installed.
- Easy identification of blown fuses when LED indicating Auto fuses are installed.

Part Number	No. Poles	Max Amps Per Block	Included Terminals
00540K	4 Pole	80A	8 x 0750I
00560K	6 Pole	100A	12 x 0750I
00580K*	8 Pole	135A	16 x 0750I

Voltage: 32V

Input Terminal Rating: 20A max. per circuit.

Body: Black PA66 GF30

Cover: Transparent cover. *00580K cover features a gasket.

Terminals: 6.35mm (1/4") Quick Connect terminals. # 0750I BK.

Kit Contents: Fuse cover, base & QC terminals.

Mounting: M5 screw (00540K & 00560K), M5 threaded insert (00580K).

Pack Size: 1, 10, 100, 500


Options: Blocks and terminals can be ordered separately, minimums apply.

Notes: Each fuse branch is independently powered. Fuses are not included.


Approvals: RoHS




Mounting Diagram - 00540K




4 Way Axial Kit




Mounting Diagram - 00560K



6 Way Axial Kit




Mounting Diagram - 00580K With Panel Cut Out



Gasket →
Threaded Insert (M5)



8 Way Axial Kit

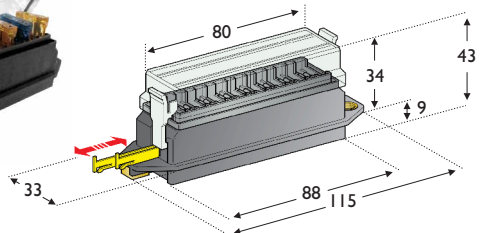

Dimensions in MM

RELATED

PRODUCTS: Auto & LED Auto Fuses (see p.17)



Email: info@prolegproducts.com.au
Web: www.prolegproducts.com.au