


14 X 51 HIGH SPEED FUSES 690VAC / 700VDC



NEW

W/O Striker Part Number	W/O Striker Part Number	With Striker Part Number	Ampere Rating
ARC14006B0	-	-	4A
ARC16006B0	-	-	6A
ARC18006B0	-	-	8A
ARC21006B0	I451-AR010	I451-AR010P	10A
ARC21206B0	I451-AR012	I451-AR012P	12A
ARC21606B0	I451-AR015	I451-AR015P	15A/16A
ARC22006B0	I451-AR020	I451-AR020P	20A
ARC22506B0	I451-AR025	I451-AR025P	25A
ARC23206B0	I451-AR032	I451-AR032P	32A
ARC24006B0	I451-AR040	I451-AR040P	40A
ARC25006B0	I451-AR050	I451-AR050P	50A

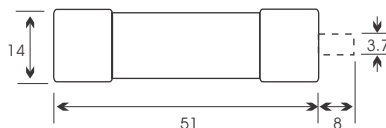

Dimensions in MM

Voltage & I.R.: (ARC Series) 80kA at 690VAC

Voltage & I.R.: (I451 Series) 200kA at 690VAC
30kA at 700VDC (10A to 50A)

Characteristic: Type aR, Very Fast Acting.

Pack Size (box): 10

Holders: Clips (call), Carriers (p127), Blocks (p133)

Features: Product features a striker indicator (10A to 50A).

Approvals: IEC/EN 60269, UL248, CE RoHS

RELATED PRODUCTS:

Fuse Block
(see p.133)


Fuse Carrier
(see p.127)



14 X 51 HIGH SPEED FUSES 690VAC / 440VDC



W/O Striker Part Number	With Striker Part Number	Ampere Rating	Total I ² t at 690VAC
-	I451-GR002P	2A	TBA
I451-GR004	I451-GR004P	4A	17
I451-GR006	I451-GR006P	6A	48
I451-GR008	I451-GR008P	8A	30
I451-GR010	I451-GR010P	10A	47
I451-GR012	I451-GR012P	12A	68
I451-GR016	I451-GR016P	16A	120
I451-GR020	I451-GR020P	20A	170
I451-GR025	I451-GR025P	25A	333
I451-GR032	I451-GR032P	32A	679
I451-GR040	I451-GR040P	40A	1 331
I451-GR050	I451-GR050P	50A	2 200

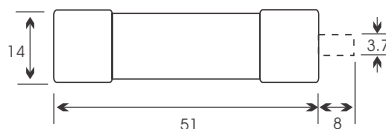

Dimensions in MM

Voltage & I.R.: 200kA at 690VAC

30kA at 440VDC (Excluding 2A)

Characteristic: Type gR, Very Fast Acting

Pack Size (box): 10

Holders: Clips (call), Carriers (p127), Blocks (p133)

Features: Product features a striker indicator (8A to 50A).

Approvals: IEC/EN 60269, UL248, CE RoHS



Strikers: A striker is a pin that pops out with force from the top side of one fuse cap.

This striker has a dual function. Firstly it acts as a visual indication that a fuse has blown.

Secondly it can also be used in-conjunction with a microswitch to trigger an alert of a problem.