


Dimensions in MM

Part Number	Description	A	B
TB300-04B	4 Poles	82.6	71.4
TB300-06B	6 Poles	111.1	100.2
TB300-08B	8 Poles	139.8	128.6
TB300-10B	10 Poles	168.3	157.3
TB300-12B	12 Poles	197.0	185.8
J301-J	Jumper 30A Flat Slip On		



Rating & Voltage: 30A at 600V
Wire Range: # 8 - 22 AWG CU (TB300 series)
Screw Size: #8-32 Phillips screws (TB300 series)
Operating Temperature: -40°C to 130°C
Base: UL rated 94V0 thermoplastic (black)
Terminal: Tin plated brass
Screws: Nickel plated brass (Phillslot) screws included.
Pack Size: Please call sales.
Breakdown Voltage: 7500V (TB300 series)
Note: Jumpers allow creation of common circuits.
Approvals: CE IEC

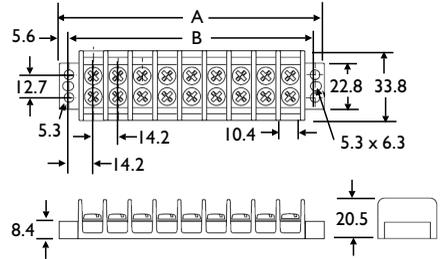

3AG SCREW MOUNT FUSE BLOCKS


Part Number	Terminal
S-8002-1-R	Solder terminal, 40°, 30A
S-8202-1-R	1/4" Quick Connect, 40°, 30A
S-8301-1-R	Screw terminal, straight, 30A

Voltage: 300VAC / 300VDC
Body: Flame retardant thermoplastic UL 94 V0
Clips: Spring Bronze, Tin-Lead plated
Pack Size: Please call sales
Notes: Multipole versions available up to 12 poles in breakaway design. Single pole blocks may be ordered without the anti-rotational pin (by adding an 'X' to the part number eg. S-8002-1X). Contact sales for further information.
Notes: Fuse is not included.
Approvals: RoHS


Solder Terminal



Quick Connect




Screw Terminal



RELATED PRODUCTS:




Fuses: 3AG / 3AB p16-17

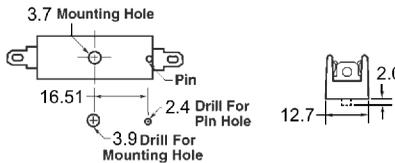

3AG LOW PROFILE PANEL MOUNT FUSE HOLDER

Part Number
05-006

Rating: 10A
Voltage: 250VAC
Pack Size (bag): 10, 100, 1000
Hardware: Includes washers & metal nut.
Notes: Fuse is not included.
Approvals:



Mounting Hole

