

PCB MOUNT AXIAL LEAD FUSES FAST ACTING 125V

Bel Fuse / Littelfuse

Bel Fuse MQ Series

Sample P/N: MQ002 for a 2A fuse.

I.R.: 50A at 125VAC, 300A at 125VDC


Voltage: 125VAC/VDC

Ratings (23): 100mA - 15A

Wire Diameter: 0.64mm (7A or less), 0.81 mm (above 7A)

Notes: End of life.

Approvals:    

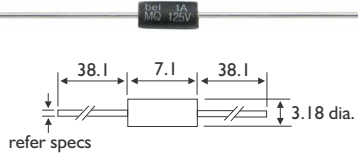

Littelfuse 251 Series

Sample P/N: 0251004 for a 4A fuse.

I.R.: 300A at rated VDC, 50A at rated VAC

Voltage: 62mA to 10A Rated at 125VAC/VDC


12A to 15A Rated at 32VAC/VDC

Ratings (20) 62mA - 15A

Wire Diameter: 0.64mm (10A or less), 0.81 mm (above 10A)

Pack Size: Mixed packs, please contact sales

Approvals*:      

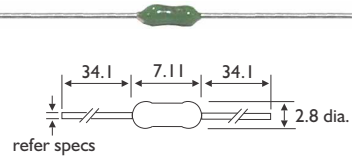

Dimensions in MM

PCB MOUNT AXIAL LEAD FUSES SLOW ACTING 125V

Bel Fuse / Littelfuse

Bel Fuse MS Series

Sample P/N: MS007 for a 7A fuse.


I.R.: 50A at 125VAC, 300A at 125VDC

Voltage: 125VAC/VDC

Ratings (15): 250mA - 7A

Notes: End of life.

Approvals:    

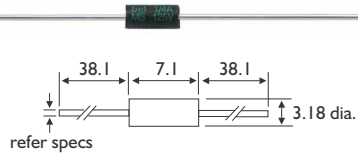

Littelfuse 473 Series

Sample P/N: 0473005 for a 5A fuse.

I.R.: 50A at 125VAC/VDC


Voltage: 125VAC/VDC

Ratings (13): 375mA to 7A

Pack Size: Mixed packs, please contact sales

Notes: Meti (PSE) approval from 1A to 5A only.

Approvals:    

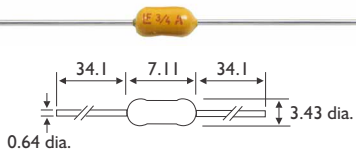

Dimensions in MM

PCB MOUNT AXIAL LEAD FUSES VERY FAST ACTING 250V

Littelfuse

Littelfuse 263 Series

Sample P/N: 0263003 for a 3A fuse.


I.R.: 50A at 250VAC, (PSE approval: 100A at 125VAC)

Voltage: 250VAC

Ratings (14): 62mA to 5A

Pack Size: Mixed packs, please contact sales.

Approvals*:    

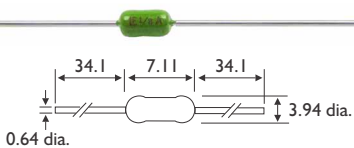

Dimensions in MM

*excludes some ratings, please contact sales.