

**BAO / OSD SERIES SIZE A3 (TIS / K07)**

Bussmann Part Number	Redspot (550V) Part Number	Ampere Rating	Voltage (VAC)	Type
-	TIS35L	35A	415V	gG
BAO040	TIS40L	40A	550V	gG
BAO050	TIS50L	50A	550V	gG
BAO063	TIS63L	63A	550V	gG
BAO63M80	TIS63M80L	63A (80M)	550V	gM
BAO63M100	TIS63M100L	63A (100M)	550V	gM
OSD080	OS80	80A	500V	gG
OSD100	OS100	100A	500V	gG
OSD100M125	OS100M125	100A (125M)	415V	gM
OSD100M160	-	100A (160M)	415V	gM
63/100CML	-	NEUTRAL	415V	-

**BAO / OSD / CEO / DEO Specification**

**I.R.:** 80kA at rated VAC  
**Voltage:** VAC (As listed)  
 VDC (Please call)  
**Characteristic:** See Type Listing  
**Pack Size (box):** 5, 10  
**Holders (BAO):** Carriers (p129 & 131)  
**Holders (OSD):** Carriers (p131)  
**Holders (CEO):** Carriers (p129)  
**Notes:** 660V versions may also be available contact sales for further information.  
**Approvals:** BS88, IEC269-1  
**NOTE:** Some dimensions may vary between brands. Please contact us before ordering.

**CEO SERIES SIZE A4 (TCP / L14)**

Bussmann Part Number	Redspot (550V) Part Number	Ampere Rating	Voltage (VAC)	Type
CEO032	-	32A	550V	gG
CEO040	-	40A	550V	gG
CEO050	-	50A	550V	gG
CEO063	-	63A	550V	gG
CEO080	TCP80L	80A	550V	gG
CEO100	TCP100L	100A	550V	gG
CEO100M125	TCP100M125L	100A (125M)	415V	gM
CEO100M160	TCP100M160L	100A (160M)	415V	gM
CEO100M200	TCP100M200L	100A (200M)	415V	gM

**BAO**



**OSD**



**CEO**





**DEO**



**DEO SERIES SIZE A4 (TFP / M14)**

Bussmann Part Number	Redspot (415V) Part Number	Ampere Rating	Voltage (VAC)	Type
DEO125	TFP125L	125A	415V	gG
DEO160	TFP160L	160A	415V	gG
DEO200	TFP200L	200A	415V	gG
DEO200M250	TFP200M250L	200A (250M)	415V	gM
DEO200M315	TFP200M315L	200A (315M)	415V	gM

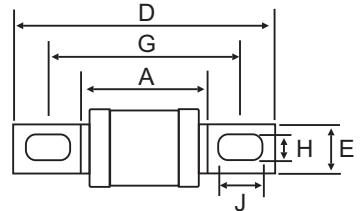

Dimensions in MM

Fuse	Ampere Rating	A	B	D	E	F	G	H	J	K
BAO	40A - 63M100	54.5	21	87	12.7	1.2	73	5.5	8	22.3
OSD	80A - 100A	54.5	21	95	12.7	1.2	73	5.5	7.8	22.3
OSD	100M125-100M160	54	25.7	94.5	12.7	1.2	73	5.5	7.8	24.7
CEO	32A - 100A	58.5	21	109.5	14.3	3.2	94	8.7	11	24.5
CEO	100M125 - 100M160	58	25.8	109	14.3	3.2	94	8.7	11	26.8
CEO	100M200	47	31	110	19	3.2	94	9	10	29.5
DEO	125A - 200M315	47	29.5	110	19	3.2	94	9	10	31