

EV / HYBRID PDU CENTRE TAG FUSES AEX 1000V




Best in class to protect high power EV & HEV high power battery charging and managing systems.

Part Number	Ampere Rating	Dia.
AEX270073I	70A	3I
AEX280073I	80A	3I
AEX290073I	90A	3I
AEX310073I	100A	3I
AEX3125738	125A	38
AEX3150738	150A	38
AEX3175738	175A	38
AEX3200738	200A	38
AEX325075I	250A	5I
AEX330075I	300A	5I
AEX335075I	350A	5I
AEX340075I	400A	5I
AEX350075I	500A	5I
AEX3600764	600A	64



Voltage & I.R.: 1000VDC, 50kA at 1000VDC
Voltage & I.R.: 1000VAC, 100kA at 1000VAC
Time Constant: (L/R) 2 ± 0.5 ms
Designed To: JASO D622, ISO8820-8, UL248-20
Complies: IEC60269-7, UL248-13, GB/T 13539-4
Approvals:

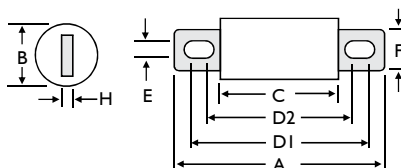

RELATED PRODUCTS:



Fuse Blocks



Fuse Blocks

		Dimensions in MM								
Series	Amperage	A	B	C	D1	D2	E	F	H	
AEX...73I	70A-100A	125	31	86	109	102	8.5	22	5	
AEX...738	125A-200A	140	38	83	118	100	10.5	25	6	
AEX...75I	250A-500A	146	51	89	126	107	10.5	38	6	
AEX...764	600A	196	64	88	162	122	13	50	10	